



OUTDOOR STORAGE

MODEL N° 6414

OWNER'S MANUAL

Keep this Identification Number in case you must contact our Customer Service Department.

IMPORTANT! PLEASE READ BEFORE BEGINNING ASSEMBLY

Dear Valued Customer,

We would like to congratulate you on your purchase of a Lifetime© Outdoor Storage Shed! We are confident that you have made the perfect choice and you will be very pleased with your new storage solution.

Lifetime© Outdoor Storage is part of the family of products created and manufactured by Lifetime® Products, Inc. Like all of our products, you can be assured that the quality of your Lifetime Outdoor Storage Shed is the best in the world! And, we back that quality up by offering the best warranty in the business – A 10-year warranty that fully covers the Shed!

All of our Sheds are built with the highest-quality steel and high-density polyethylene (HDPE) parts. The design and construction of our steel-reinforced double-Wall Panels is second to none. All of our exposed steel parts and gables are powder coated and we use high-density polyethylene plastic. What makes polyethylene so special? It has superior strength and durability, and, it won't crack or degrade outdoors.

So now that you know the quality you are getting in a Lifetime Outdoor Storage Shed, please take the time to READ THIS INSTRUCTION MANUAL!

We have taken great care in providing the best possible form of instructions to help you put your new Outdoor Storage Shed together. Before you get started, PLEASE read the following preparation tips to help you get started!

We can assure you, your construction experience will be a lot more enjoyable if you do!

PREPARATION TIPS:

- The first step is simple... RELAX! You have made a great purchase, but Rome was not built in a day. Plan to spend a good part of your weekend putting together your fine Outdoor Storage Shed. Our philosophy is, if it comes together quickly and easily, it surely will come apart quickly and easily! Your Lifetime© Outdoor Storage Shed will surely last a long, long time, if you are patient, and take all the time necessary to put it together as we have instructed.
- Grab a friend to join in on the fun! This is not a one-person endeavor. We have found that not only will things go smoother if you have two or more people participating in the construction of the Shed, but it will go quicker as well. So, the more the merrier!
- Make sure you have all the tools necessary for constructing your new Shed. There is a "Tools Required For This Assembly" list on page five of this Owner's Manual.
- The plastic pieces of your Shed may become damaged by over tightening the screws. To avoid this damage, we strongly recommend the use of a low-powered power screwdriver or a drill that has an adjustable clutch that is set on a low-torque setting. If neither is available, use a hand screwdriver. If a hand screwdriver is all you have, take several breaks... your wrist will need it!
- You will also need two small ladders (when it comes time to do the roof!).

IMPORTANT! PLEASE READ BEFORE BEGINNING ASSEMBLY

- Before beginning assembly, remove the Parts List from the center of this Owner's Manual and take an inventory of the parts included with your Outdoor Storage Shed. Also, read through the entire instruction manual. It's always a great practice to get a feel for the flow of the process and to familiarize yourself with the parts involved. But, try not to get ahead of yourself and start the process out of order.
- FOLLOW THE INSTRUCTIONS IN ORDER! Everything goes together in a certain order, and we have learned what that correct order should be. In our state-of-the-art research and testing facility, we have painstakingly created these instructions. The order of construction is there for a reason, and some parts simply will not fit if built out of order. Just follow along with the order in the instructions and everything will fit together and things will go very smooth.
- YOUR SHED MUST BE BUILT ON A LEVEL SURFACE! If the spot you have chosen to place your wonderful new Outdoor Storage Shed is not level, the Shed will not assemble correctly! We recommend a concrete patio, a wood platform or creating a pad with pea gravel. Your Shed is meant to last a lifetime, so provide the proper foundation for it before you start to build.
- Before you build it, make sure you are allowed to build it! Consult all building codes, as well as city and county ordinances, to ensure that you do not require a building permit to construct your Outdoor Storage Shed. Proper building permit documentation may be required in your neighborhood, and it would be quite unfortunate to learn this after your Outdoor Storage Shed is already built!

Now that you're ready to begin the construction of your wonderful new Outdoor Storage Shed, step back, take a deep breath, get yourself a large cold beverage and enjoy yourself. We guarantee that after spending the right amount of time in building your Shed, you will be able to enjoy it for years to come.

Thanks for choosing Lifetime®, and have fun!

ABOUT LIFETIME PRODUCTS, INC.

Lifetime Products, Inc., has applied innovation and cutting-edge technology in plastics and metals to create a family of affordable lifestyle products that feature superior strength and durability. The world's leading manufacturer of folding tables and chairs, Lifetime was founded in 1986 as the maker of portable basketball systems that revolutionized the industry with patented technology. With diverse offerings such as outdoor storage sheds and steel utility trailers, Lifetime continues to develop innovative products that outfit the way you live.

Lifetime makes the things you need for the lifestyle you want. By innovating products in and around the home, Lifetime simplifies your everyday life and enables you to get the most out of your free time.



REGISTER YOUR LIFETIME PRODUCT TODAY!

There are benefits to registering your Lifetime product. With our new online product registration form, it's fast and easy! Register with us at www.lifetime.com and enjoy these great benefits:

- Receive exclusive money-saving offers from BuyLifetime.com, our online store, as well as NEW product notifications and special closeout promotions!
- In the unlikely event of a product recall or safety modification, we will notify you.
- Registering your product guarantees you warranty service. If you do not register your product, your warranty rights will not be diminished. But you will need to provide a sales receipt to verify your product purchase date before warranty service will be provided.

LIFETIME'S PROMISE TO YOU:

Maintaining your privacy is our long-standing policy at Lifetime. And you can rest assured that Lifetime will not sell or provide your personal data to other third parties, or allow them to use your personal data for their own purposes.

We invite you to read our privacy policy at www.lifetime.com

REGISTER today!

****U.S. and Canada customers ONLY****

IF ASSISTANCE IS NEEDED,

DO NOT CONTACT THE STORE!

CALL OUR CUSTOMER SERVICE DEPARTMENT at 1 (800) 225-3865

HOURS: 7:00 a.m. to 5:00 p.m. Monday through Friday (Mountain Standard Time)

Call, or visit our Web site for Saturday hours

For customers outside the U.S. or Canada, please contact the store for assistance.



SAFETY INSTRUCTIONS



FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

To ensure safety, do not attempt to assemble this product without following the instructions carefully. Check entire box and inside all packing material for parts and/or additional instruction material. Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document. Proper and complete assembly, use and supervision are essential to reduce the risk of accident or injury.

- Do not use or store hot objects such as grills, blowtorches, welding equipment, etc. near the product.
- If using a ladder during assembly, use extreme caution.
- Two capable adults are required for assembly. (It is also recommended that a third adult function as an instruction reader.)

Most injuries are caused by misuse and/or not following instructions. Use caution when using this product.


BEFORE BEGINNING ASSEMBLY



Keep the hardware bags and their contents separate. If any parts are missing, call our Customer Service Department.



Read the "Congratulations" letter on page 2-3. Identify and inventory all parts and hardware using the parts and hardware lists and identifiers in this document.

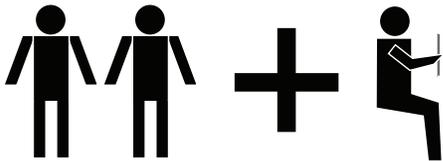

****Two adults required to complete assembly****
(+ one adult suggested as an instruction reader)

Only adults should set up the product. Do not allow children in the set-up area until assembly is complete.



TOOLS REQUIRED FOR ASSEMBLY

7/16"



(2)

3/8"




(1)

Adjustable



(1)

Rubber Mallet



(1)

Box Knife



(1)

Phillips Screwdriver



(1)

3/16" Masonry Bit



(1)

2" x 4" x 3' Leveling Board



(1)

6' Ladder




(2)

Power Drill*



(1)

Work Light



(1)

Pliers




(1)

Flashlight



(1)

Hammer Drill*



(1)

Safety Glasses



(1 for each person)

*See "Screwdriver Notice" on page 7.


ASSEMBLY GUIDES

Refer to the following areas throughout the instructions to assist in the assembly process:

This area is located at the top, left-hand corner of the page and indicates which tools and hardware are needed to complete the assembly steps on a page.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

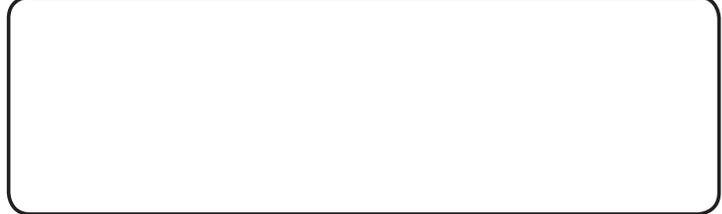

This area is located at the top, right-hand corner of the page and shows an image of the product with shaded parts indicating which section is being assembled.



This area is usually located in the bottom, left-hand corner of a step and indicates that special attention is needed to perform a particular part of a step.



Note:

These areas are usually located in the bottom, right-hand corner of a step and indicate that damage to the product or serious injury may occur if the caution or warning is not heeded.




CAUTION



WARNING

Throughout the Parts & Hardware List, Part & Hardware Identifiers, and instructions are three-letter IDs. These IDs are below the images of the parts and hardware to help you locate and identify the parts and hardware during assembly. These IDs are not necessarily on the parts themselves.



ADZ (x10)
1/4" x 5/8" Pan-Head Screw

IMPORTANT NOTICES

Level Surface Notice:

Surface must be leveled before installation. We recommend building a level work space with a concrete or patio style surface. If the surface is not properly leveled, the Outdoor Shed will not assemble correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.

Building Code Notice:

Consult all local building codes, as well as city and county ordinances, to ensure that the construction of the Outdoor Shed does not require a building permit. Proper building permit documentation may be required in your neighborhood, and it would be unfortunate to learn this after constructing the Shed.

Screwdriver Notice:

You may use a #2 Phillips head screwdriver bit and a power screwdriver or drill, instead of a hand screwdriver. However, be aware that the plastic pieces of your Shed can be damaged by overtightening of screws. To avoid damage we strongly recommend the use of a low-powered power screwdriver or a drill that has an adjustable clutch that is set on a low torque setting. If neither is available, use a hand screwdriver. In any case use caution to avoid overtightening the screws.

Floor Puncture Notice:

Sharp objects may damage your floor. If resting sharp, heavy objects on your Shed floor, place a block of wood between the sharp object and floor.



CAUTION:

If more than six (6) inches of snow accumulate on the roof of the shed, carefully remove the snow to avoid possible roof collapse. While standing on the ground, remove the snow from the roof with a broom or snow shovel. Do not stand on the roof to remove snow.

Snow Load Kit available from Customer Service for high snow areas.

PARTS & HARDWARE LIST

BOX 1

ID	Description	Qty
BUA	BOX 1 METAL KIT BOX	
AFQ	Wall Support Channel	8
AFG	Truss Brace Channel	1
AFC	Door End Channel	2
AFR	Corner Channel	4
AFD	Door Header Channel	1
AFH	Truss Gutter Channel	2
AFP	Truss Support Strip	2
AFJ	Long Wall Support Channel Extension	2
AFN	Short Wall Support Channel Extension	4
BTI	DOOR HINGE PARTS KIT	
AFK	Right Hinge Assembly	1
AFI	Left Hinge Assembly	1
	PLASTIC & MISCELLANEOUS PARTS	
AFS	10" x 30" Shelf	5
AGU	Outer Roof Panel "A"	2
AGV	Outer Roof Panel "B"	2
AFT	14" x 30" Shelf	2
AGH	Gable Half 1	2
AGI	Gable Half 2	2
AGS	Outer Floor Panel "A"	2
AGT	Outer Floor Panel "B"	2
AGE	End Roof Cap	2
AFF	Gable Truss Brace	2
AFB	Door Brace	6
BUE	BOX 1 SHED PARTS BOX	
AFU	Pegboard Strip	2
AIZ	14" Shelf Bracket	4
AHA	Roof Cap Cover	2
BKB	Left Door Assembly Hardware	
AHZ	Left Door Handle	1
AHM	Dead Bolt Latch	2
AIA	Left Door Lock Bracket	1
AIB	Left Door Strike Plate	1
ADZ	1/4" x 5/8" Pan-Head Screw	9
ADX	#10 x 1/2" Pan-Head Screw	3
AEE	#10 x 1/2" Flat Washer	3
ACH	1/4" x 1 1/2" Carriage Bolt	2
ADJ	1/4" Cap Nut	2
BKC	Right Door Assembly Hardware	
AIK	Right Door Handle	1
AIO	Thumb Lever	1
AHV	Door Latch	1
AIL	Right Door Lock Bracket	1
AHX	Latch Cover Plate	1
AHW	Latch Block	1
ADZ	1/4" x 5/8" Pan-Head Screw	9
ADW	#10 x 3/4" Pan-Head Screw	4
AEE	#10 x 1/2" Flat Washer	3
ADB	3/8" x 1/2" Steel Spacer	2
AHY	Latch Spring	1
ACI	1/4" x 2" Carriage Bolt	2
AAB	1/4" Centerlock Nut	2
AEB	1/4" Flat Washer	2
BGV	Truss Assembly Hardware	
ADJ	1/4" Cap Nut	10
AAK	1/4" x 1 1/2" Hex Bolt	10
AIP	Truss Connector	1
AHT	Floor Bracket	2

ID	Description	Qty
BUB	Wall Panel Installation Hardware	
ADZ	1/4" x 5/8" Pan-Head Screw	65
ADC	#2 Phillips Bit	1
BUD	Truss & Wall/Shelf Support Channel Assembly & Installation Hardware	
ADZ	1/4" x 5/8" Pan-Head Screw	64
AAK	1/4" x 1 1/2" Hex Bolt	18
ADJ	1/4" Cap Nut	18
AHT	Floor Bracket	6
BNA	Gable Assembly Hardware (x2)	
AGP	Louvered Vent	1
AIQ	Vent Screen	1
ADW	#10 x 3/4" Pan-Head Screw	5
AEE	#10 x 1/2" Flat Washer	5
ADZ	1/4" x 5/8" Pan-Head Screw	4
BHC	Pegboard Strip Installation Hardware	
ADW	#10 x 3/4" Pan-Head Screw	10
BHD	Tool Clip Assortment	
AIF	2" Double-Arm Hook	1
AIG	4" Double-Arm Hook	1
AIL	L-Hook	3
AIH	J-Hook	3
AIJ	Tool Holder	2
BKD	Door & Entry Gable Installation	
ADZ	1/4" x 5/8" Pan-Head Screw	24
ACH	1/4" x 1 1/2" Carriage Bolt	4
ACA	1/4" x 1/2" Carriage Bolt	4
ADJ	1/4" Cap Nut	8
ADX	#10 x 1/2" Pan-Head Screw	2
AEB	1/4" Flat Washer	4
AHL	Dead Bolt Strike Plate	1
AHN	Floor Bracket	2
BND	Trim Installation Hardware	
AGA	Corner Trim Bracket	24
AHQ	Door Trim Bracket	4
AHR	Door Trim Clip	2
ADX	#10 x 1/2" Pan-Head Screw	56
ACK	#8 x 1" Pan-Head Screw	4
	SHELF INSTALLATION HARDWARE	
BHH	10" x 30" Shelf Installation Hardware (x5)	
ADZ	1/4" x 5/8" Pan-Head Screw	14
AIY	10" Shelf Bracket	2
BMY	14" x 30" Shelf Installation Hardware (x2)	
ADX	#10 x 1/2" Pan-Head Screw	4
AEE	#10 Flat Washer	4
BUC	Roof & Rear Gable Installation Hardware	
ADZ	1/4" x 5/8" Pan-Head Screw	86
ACJ	#10 x 5/8" Pan-Head Screw	4
AED	#10 x 1" Fender Washer	4
ADX	#10 x 1/2" Pan-Head Screw	4
ACF	#10 x 5/16" Pan-Head Screw	1
ADK	#10 Cap Nut	1
AJA	Foam Cube	4
BTM	Door Spacing Adjustment Hardware	
ADZ	1/4" x 5/8" Pan-Head Screw	4

BOX 2

PLASTIC PARTS

AHD	Wall Panel	8
AGO	Left Door	1
AGZ	Right Door	1
AQX	Corner Trim	4
AGC	Top Door Trim	1
AGD	Side Door Trim	2

PARTS IDENTIFIER

BOX 1


Parts shown at 8% of actual size




AFQ (x8)
Wall/Shelf Support Channel





AFG (x1)
Truss Brace Channel




AFC (x2)
Door End Channel






AFR (x4)
Corner Channel



AFD (x1)
Door Header Channel



AFH (x2)
Truss Gutter Channel





AFP (x2)
Truss Support Strip

AFJ (x2)
Long Wall Support Channel Extension



AFN (x4)
Short Wall Support Channel Extension

DOOR HINGE PARTS KIT [BTI]

Parts shown at 8% of actual size



AFI (x1)
Left Hinge Assembly




AFK (x1)
Right Hinge Assembly

PARTS IDENTIFIER


BOX 1 (CONT.)

PLASTIC & MISCELLANEOUS PARTS


Parts shown at 4% of actual size




AFS (x5)
10" x 30" Shelf




AFT (x2)
14" x 30" Shelf

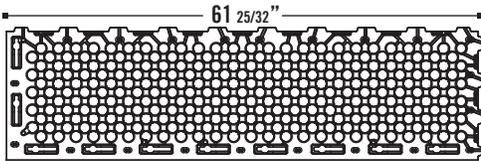


AGS (x2)
Outer Floor Panel "A"

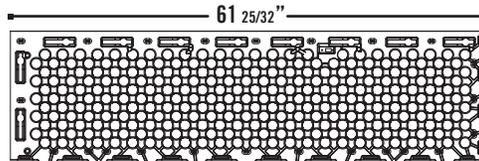


AGT (x2)
Outer Floor Panel "B"

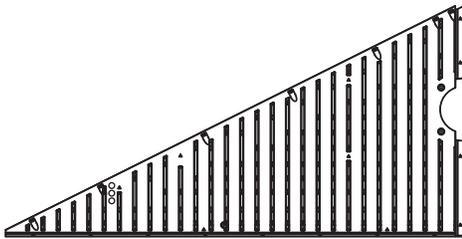


AGH (x2)
Gable Half 1

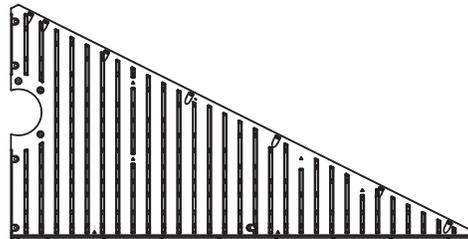


AGI (x2)
Gable Half 2

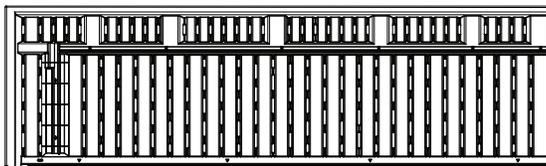


AGU (x2)
Outer Roof Panel "A"

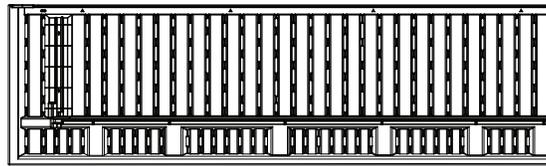


AGV (x2)
Outer Roof Panel "B"



AGE (x2)
End Roof Cap



AFF (x2)
Gable Truss Brace



AFB (x6)
Door Brace




Note: Throughout the Parts & Hardware List, Part & Hardware Identifiers, and instructions are three-letter IDs. These IDs are below the images of the parts and hardware to help you locate and identify the parts and hardware during assembly. These IDs are not necessarily on the parts themselves.

PARTS & HARDWARE IDENTIFIER

BOX 1 (CONT.)

BOX 1 SHED PARTS BOX [BUE]


Parts shown at 15% of actual size (*Unless otherwise noted)



AFU (x2)
Pegboard Strip




AIZ (x4)
14" Shelf Bracket




AHA (x2)
Roof Cap Cover

LEFT DOOR ASSEMBLY HARDWARE [BKB]


Hardware shown at actual size (*Unless otherwise noted)




***AHZ** (x1)
Left Door Handle




***AHM** (x2)
Deadbolt Latch



ACH (x2)
1/4" x 1 1/2" Carriage Bolt



ADX (x3)
#10 x 1/2" Pan-Head Screw




AEE (x3)
#10 x 1/2" Flat Washer




ADJ (x2)
1/4" Cap Nut



***AIA** (x1)
Left Door Lock Bracket




***AIB** (x1)
Left Door Strike Plate




ADZ (x9)
1/4" x 5/8" Pan-Head Screw

RIGHT DOOR ASSEMBLY HARDWARE [BKC]


Hardware shown at actual size (*Unless otherwise noted)



***AIK** (x1)
Right Door Handle



ACI (x2)
1/4" x 2" Carriage Bolt




AEE (x3)
#10 x 1/2" Flat Washer
(Only 3 are used)




ADB (x2)
3/8" x 1/2" Steel Spacer




AAB (x2)
1/4" Centerlock Nut




AHY (x1)
Latch Spring




***AHW** (x1)
Latch Block



***AIO** (x1)
Thumb Lever




ADW (x4)
#10 x 3/4" Pan-Head Screw




AEB (x2)
1/4" Flat Washer




***AHX** (x1)
Latch Cover Plate



***AHV** (x1)
Door Latch



***AIL** (x1)
Right Door Lock Bracket




ADZ (x9)
1/4" x 5/8" Pan-Head Screw

PARTS & HARDWARE IDENTIFIER

BOX 1 (CONT.)

WALL PANEL INSTALLATION HARDWARE [BUB]

Hardware shown at actual size




ADZ (x65)
1/4" x 5/8" Pan-Head Screw (Not all screws are used)




ADZ (x65)
#2 Phillips Bit

GABLE ASSEMBLY HARDWARE [BNA] (x2)


Hardware shown at actual size




AGP (x1)
Louvered Vent




AIQ (x1)
Vent Screen



ADZ (x4)
1/4" x 5/8" Pan-Head Screw



ADW (x5)
#10 x 3/4" Pan-Head Screw



AEE (x5)
#10" x 1/2" Pan-Head Screw

PEGBOARD STRIP INSTALLATION HARDWARE [BHC]


Hardware shown at actual size




ADW (x10)
#10 x 3/4" Pan-Head Screw

Tool Clip Assortment [BHD]


Hardware shown at 50% of actual size

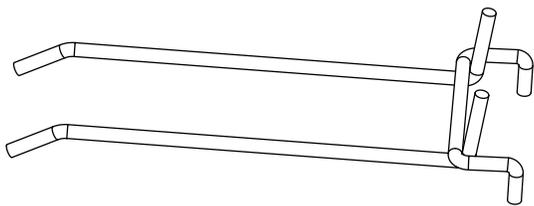


AIG (x1)
4" Double-Arm Hook

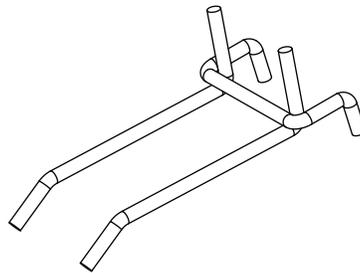

AIF (x1)
2" Double-Arm Hook



AII (x3)
L-Hook



AIH (x3)
J-Hook




AIJ (x2)
Toolholder

PARTS & HARDWARE IDENTIFIER


BOX 1 (CONT.)

DOOR & ENTRY GABLE INSTALLATION HARDWARE [BKD]

Hardware shown at actual size (*Unless otherwise noted)



ADZ (x24)
1/4" x 5/8" Pan-Head Screw




ACH (x4)
1/4" x 1 1/2" Carriage Bolt



***AHL** (x1)
Dead Bolt Strike Plate




***AHN** (x2)
Floor Bracket




ADX (x2)
#10 x 1/2" Pan-Head Screw



ADJ (x8)
1/4" Cap Nut




ACA (x4)
1/4" x 1/2" Carriage Bolt




AEB (x4)
1/4" Flat Washer

TRIM INSTALLATION HARDWARE [BND]


Hardware shown at actual size (*Unless otherwise noted)




***AGA** (x24)
Corner Trim Bracket




***AHQ** (x4)
Door Trim Bracket



***AHR** (x2)
Door Trim Clip



ADX (x56)
#10 x 1/2" Pan-Head Screw




ACK (x4)
#8 x 1" Pan-Head Screw


SHELF INSTALLATION HARDWARE

Hardware shown at actual size (*Unless noted otherwise)


14" x 30" Shelf Hardware [BMY] (x2)



ADX (x4)
#10 x 1/2" Pan-Head Screw



AEE (x4)
#10 Flat Washer




ADX (x14)
#10 x 1/2" Pan-Head Screw
(Not all are used)



***AIY** (x2)
10" Shelf Bracket

DOOR SPACING ADJUSTMENT HARDWARE [BTM]

Hardware shown at actual size



ADZ (x4)
1/4" x 5/8" Pan-Head Screw

PARTS & HARDWARE IDENTIFIER


BOX 1 (CONT.)

TRUSS ASSEMBLY HARDWARE [BGV]

Hardware shown at actual size (*Unless otherwise noted)




ADJ (x10)
1/4" Cap Nut



AAK (x10)
1/4" x 1 1/2" Hex Bolt




***AHT (x2)**
Floor Bracket




***AIP (x1)**
Truss Connector

TRUSS & WALL/SHELF SUPPORT CHANNEL ASSEMBLY INSTALLATION HARDWARE [BUD]

Hardware shown at actual size (*Unless otherwise noted)



ADZ (x64)
1/4" x 5/8" Pan-Head Screw



AAK (x18)
1/4" x 1 1/2" Hex Bolt




ADJ (x18)
1/4" Cap Nut




***AHT (x6)**
Floor Bracket

ROOF & REAR GABLE INSTALLATION HARDWARE [BUC]

Hardware shown at actual size (*Unless otherwise noted)




ADZ (x86)
1/4" x 5/8" Pan-Head Screw



***AJA (x4)**
Foam Cube




ADK (x1)
#10 Cap Nut




ACJ (x4)
#10 x 5/8" Pan-Head Screw



ACF (x1)
#10 x 5/16" Pan-Head Screw



AED (x4) #10 x 1"
Fender Washer




ADX (x4)
#10 x 1/2" Pan-Head Screw

PARTS IDENTIFIER


BOX 2

PLASTIC & MISCELLANEOUS PARTS


Parts shown at 4% of actual size

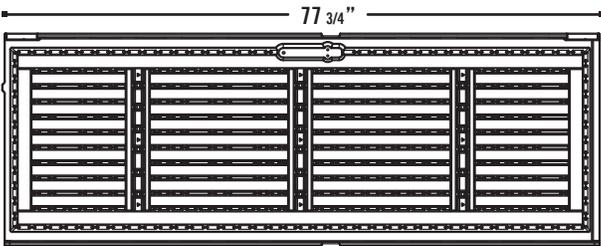


AG0 (x1)
Left Door

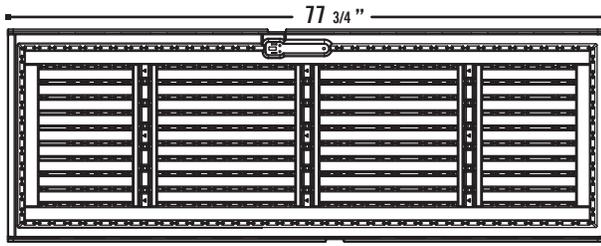


AGZ (x1)
Right Door

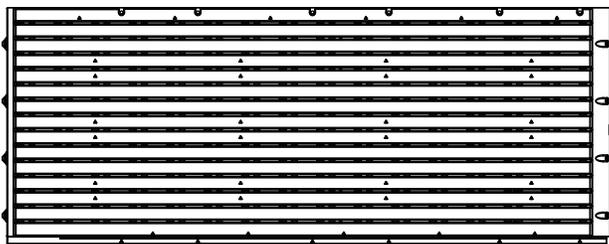


AHD (x8)
Wall Panel

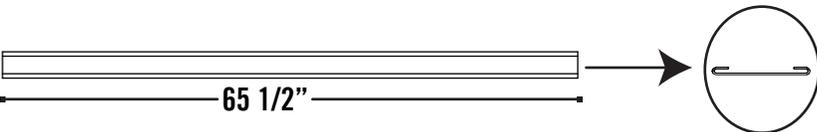

AGC (x1)
Top Door Trim

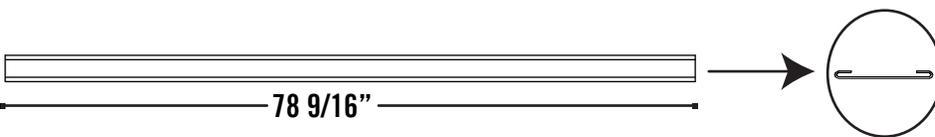

AGD (x2)
Side Door Trim

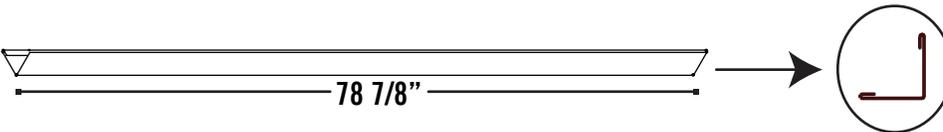

AQX (x4)
Corner Trim



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC. 1



Concrete (1 cu. yd.)



SEC


1.1

SITE PREPARATION - CONCRETE PLATFORM PREPARATION

The actual dimensions of your shed (at its widest and longest points) are 11' x 3'6". Ensure you select a site that will accommodate these measurements. The base of the shed is slightly smaller than this, so you will need to create a level surface that is at least 123 1/2" x 34". We recommend using a level cement or patio style surface. This will provide the best long-term performance for your shed.



Note: Shed Extension Kits are available for this shed. Please consider possible shed expansion when planning the site for your shed. See back cover of this manual for information on ordering accessories.

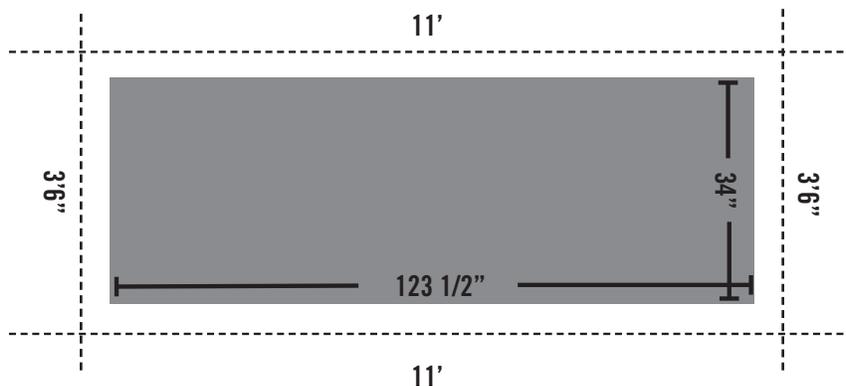

Note: Surface must be leveled before installation. If the surface is not properly leveled, the Outdoor Shed will not assemble or function correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.



Note: Any platform or similar structure should be built above ground in order to avoid water pooling inside the Shed.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



2" x 4" x 120 1/2" (x4) (Not included)



2" x 4" x 34" (x2) (Not included)



16d 3" Common Nail (x16) (Not included)

SEC 1



SEC


1.2

ALTERNATIVE SITE PREPARATION: OPTION 1 - WOOD PLATFORM ASSEMBLY



Ensure all lumber used is treated and approved for outdoor use. Build outside frame to 123 1/2" x 34" **outside dimensions**:



Note: Whenever possible, you should use the surfaces described on Page 7. When this is not possible, we recommend you use a wood platform or a filled wood frame.

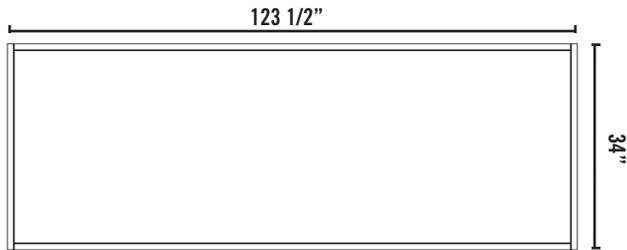

To be sure to have studs in the correct location to nail plywood in the next step, start measuring from outside edge of first board to the center of the second. Then measure the remaining boards from center to center.

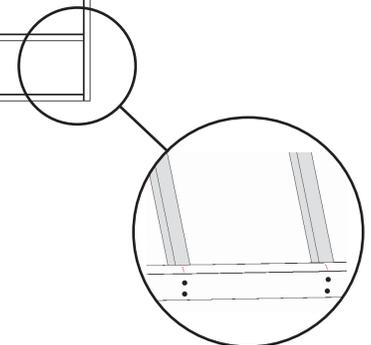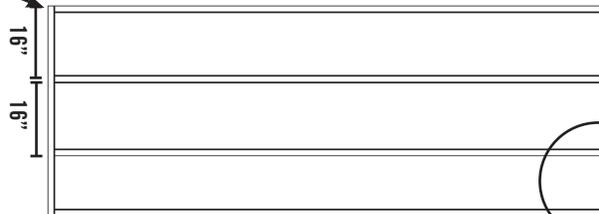

Place the 2" x 4" x 120 1/2" boards on the inside of the frame. Nail each board in place with the 16d nails.



Note: All lumber must be rated for outdoor use.




Note: Surface must be leveled before installation. If the surface is not properly leveled, the Outdoor Shed will not assemble or function correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC. 1

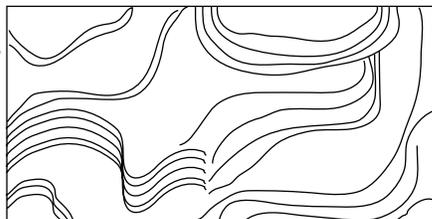

34" x 96" x 3/4" Treated Plywood (x1)
(Not included)

34" x 27 1/2" x 3/4" Treated Plywood (x1)
(Not included)



8d 1 1/2" Common Nail (x28)
(Not included)




SEC

1.3

ALTERNATIVE SITE PREPARATION: OPTION 1 - WOOD PLATFORM ASSEMBLY (CONT)

Square up the frame by measuring from corner to corner. Measurement A should equal Measurement B.

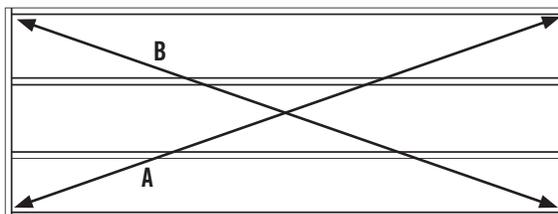


Note: All lumber must be rated for outdoor use.

SEC


1.4

Cut Plywood into sizes called for below. Arrange the Plywood according to the diagram and nail into place with 8d x 1 1/2" nails. Place platform in the desired location. If platform does not rest level on the ground, build up low points with loose dirt until platform is stable. Drill three evenly spaced 1/2" drain holes in plywood between each 2" x 4" joist.

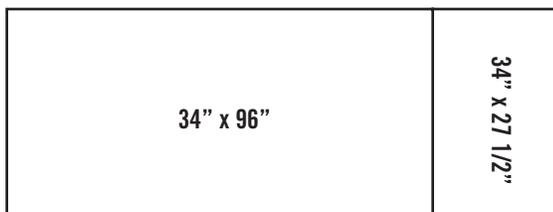



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



2" x 4" x 124" (x2) (Not included)



2" x 6" x 27" (x2) (Not included)



8d 1 1/2" Common Nail (x16)
(Not included)



Pea Gravel (2.6 Cubic Feet)
(Not included)



L-Bracket (x4)
(Not included)

SEC 1



SEC

1.5

ALTERNATIVE SITE PREPARATION: OPTION 2 - FILLED WOOD FRAME ASSEMBLY



Cut outside frame to 124" x 34" **outside dimensions**. Lay boards flat so widest parts face up. Ensure frame is level. Square up the frame by measuring from corner to corner. Measurement A should equal Measurement B. Nail an L-Bracket on each corner of the frame with 8d nails. Place platform in the desired location. If platform does not rest level on the ground, build up low points with loose dirt or "Pea" gravel, until platform is stable.



Note: Whenever possible you should use the surfaces described on Page 7.




Note: All lumber must be rated for outdoor use.

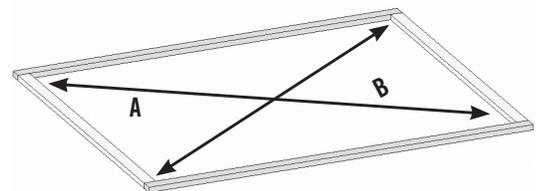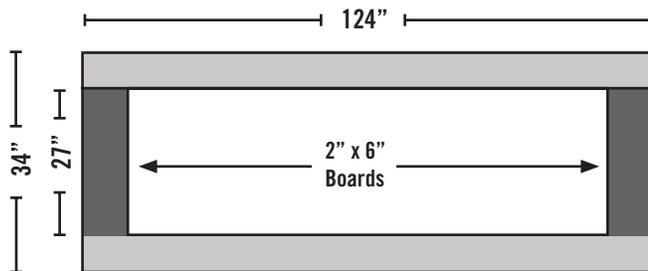

SEC

1.6


Once all boards are level and do not wobble, pack "Pea" gravel around the outside of the frame, and slope away from frame.

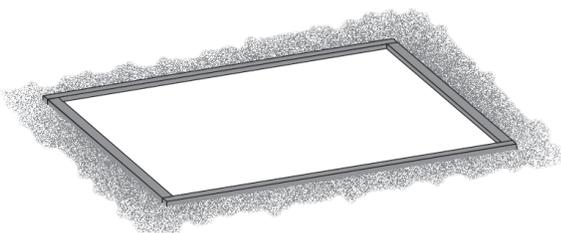

SEC

1.7

Now fill the inside of the frame with "Pea" gravel. Use a leveling board to scrape off extra fill material and to level the surface.

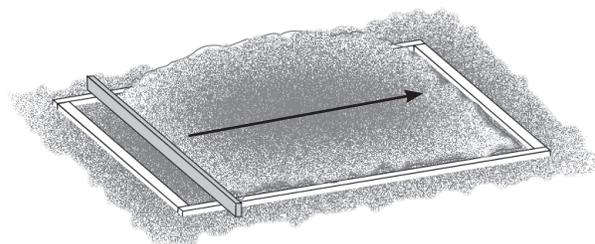


2" x 4" x 3' Leveling Board (x1)

SEC 2 FLOOR ASSEMBLY


PLASTIC PARTS REQUIRED

LOCATED IN BOX: 1

Parts shown at 4% of actual size

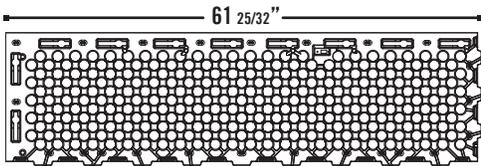


AGS (x2)
Outer Floor Panel A

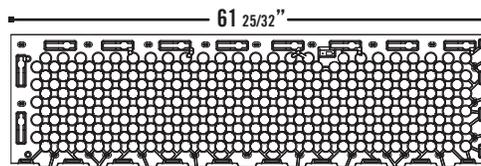

AGT (x2)
Outer Floor Panel B

TOOLS REQUIRED



Phillips Screwdriver



Safety Glasses



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE

SEC 2




SEC

2.1

FLOOR PANEL ASSEMBLY


Hold one (1) **Outer Floor Panel "B" (AGT)** at an angle against one (1) **Outer Floor Panel "A" (AGS)** so the tabs on Panel "B" fit underneath Panel "A", and the tabs on Panel A fit underneath Panel "B". Then, lay Panel "B" flat.

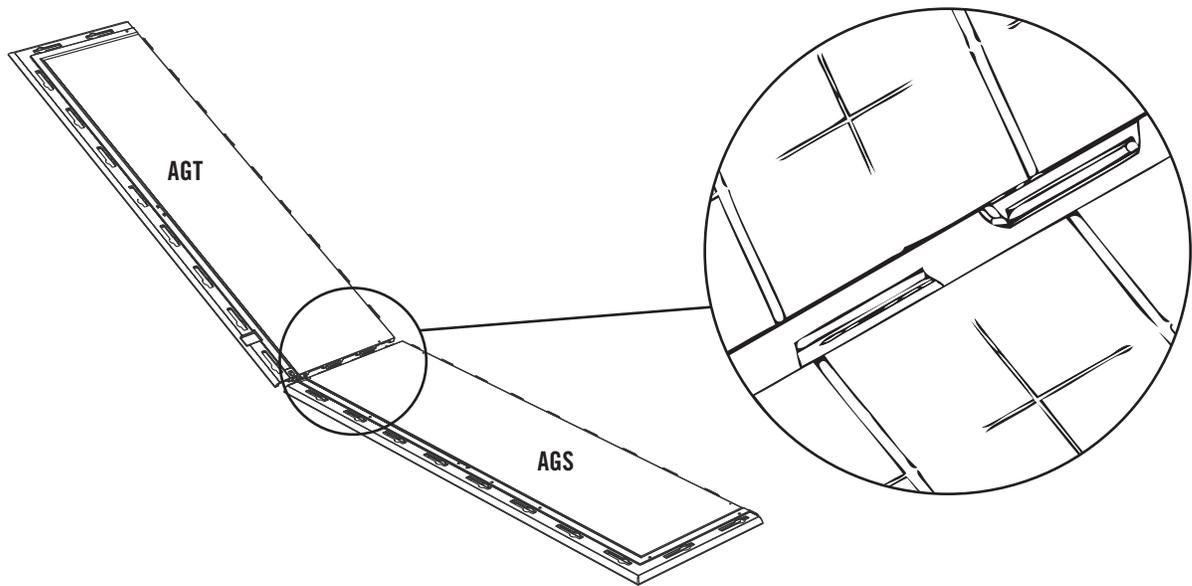

SEC

2.2

Repeat the previous step to connect the next two Outer Floor Panels. Finally, connect the last two **Outer Floor Panels (AGS & AGT)** to the first Outer Floor Panels.

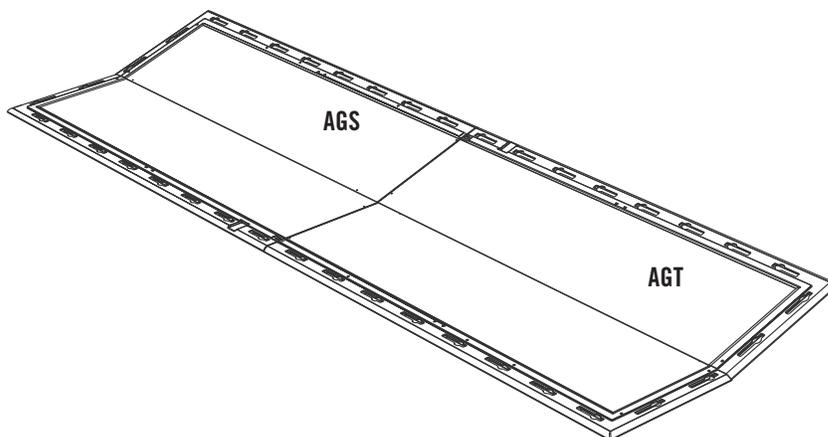


CAUTION

Sharp objects may damage your floor. If resting sharp, heavy objects on your shed floor, place a block of wood between the sharp object and floor.

SEC 3 TRUSS ASSEMBLY

HARDWARE REQUIRED

Hardware shown at actual size




AAK (x10)
1/4" x 1 1/2" Hex Bolt



ADJ (x10)
1/4" Cap Nut

HARDWARE BAG REQUIRED: BGV

Hardware shown at 50% of actual size



AIP (x1)
Truss Gutter Connector



AHT (x2)
Floor Bracket


METAL PARTS REQUIRED

Parts shown at 8% of actual size




71 11/16"

AFH (x2)
Truss Gutter Channel




79 1/2"

AFG (x1)
Truss Brace Channel



79 1/2"

AFQ (x2)
Wall/Shelf Support Channel



20 1/8"

AFP (x2)
Truss Support Strip

TOOLS REQUIRED



7/16" Wrench (x2)



Safety Glasses




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 3




7/16" (x2)



AAK (x6)



ADJ (x6)



AIP (x1)
(Not to scale)




SEC

3.1

TRUSS ASSEMBLY

Fit two **Truss Support Strips (AFP)** together. Bolt Truss Support Strips, **Truss Gutter Connector (AIP)**, and two **Truss Gutter Channels (AFH)** as shown using the required hardware.

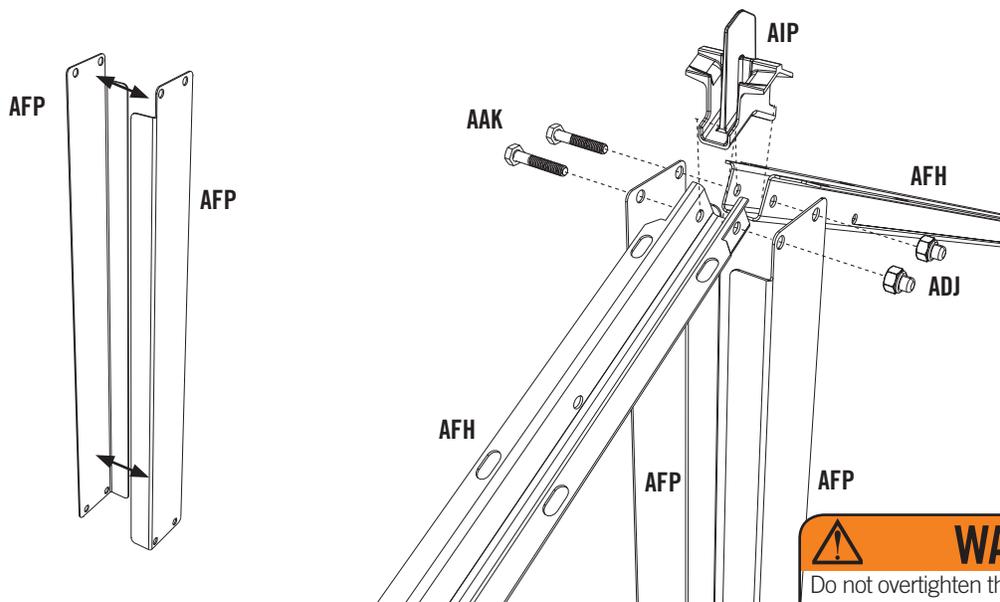

Note: Only finger tighten hardware.




WARNING

Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.

SEC

3.2

Attach **Truss Support Strips (AFP)** to the center of a **Truss Brace Channel (AFG)** (Truss Support Strips fit inside the Truss Brace Channel). Attach each end of the Truss Brace Channel to the **Truss Gutter Channels (AFH)** using the required hardware. Tighten all hardware.

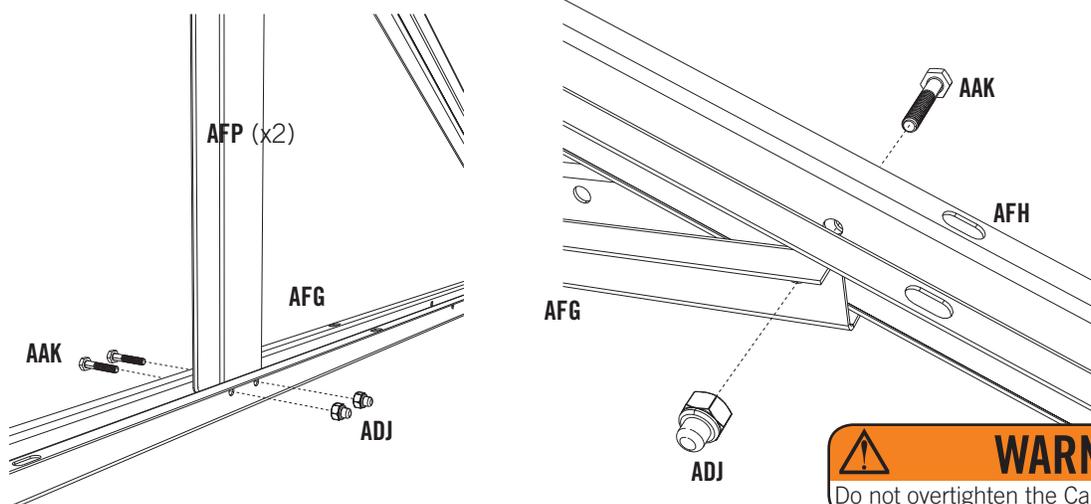

WARNING

Do not overtighten the Cap Nut.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC. 3




7/16" (x2)



AAK (x2)




ADJ (x2)




SEC

3.3

Attach Truss Assembly to two **Wall Support Channels (AFQ)** using **1/4" x 1 1/2" Hex Bolts (AAK)** and **1/4" Cap Nuts (ADJ)**. Do not completely tighten the Cap Nut until after Truss is secured to the Wall.

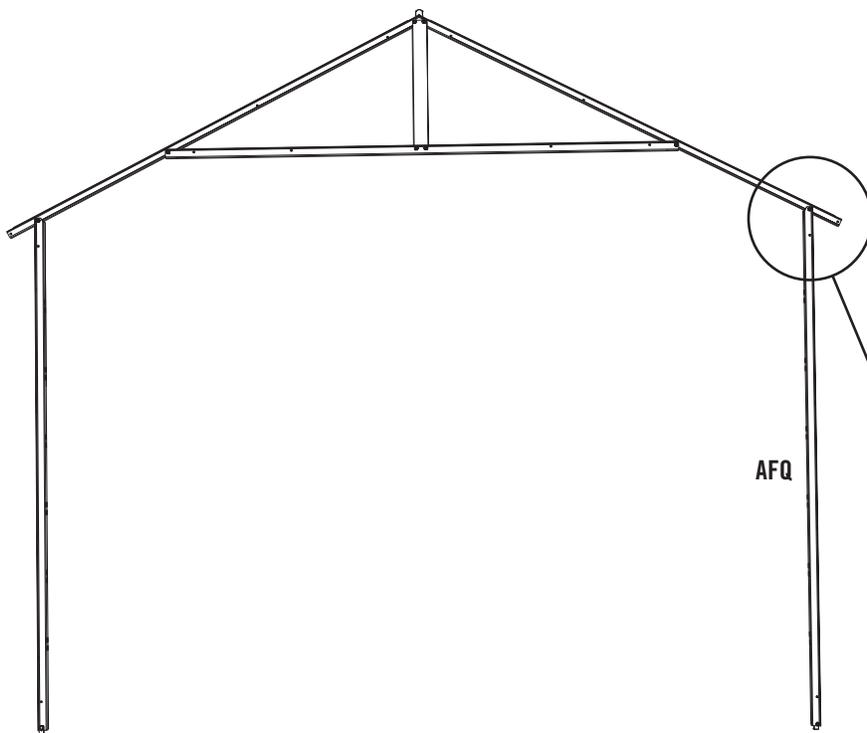

AFQ

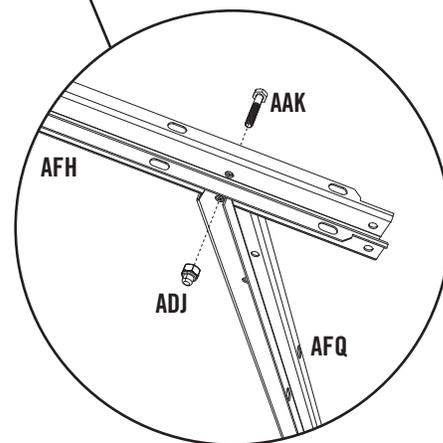

Note: Only finger tighten hardware.



WARNING

Do not overtighten the Cap Nut.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 3



7/16" (x2)



AAK (x2)



ADJ (x2)




AHT (x2)
(Not to scale)



SEC

3.4

Attach one **Floor Bracket (AHT)** to the bottom of each Wall/Shelf Support Channel using the required hardware. Tighten all hardware. **Repeat this section for all Trusses.** You need only do this step if you plan to anchor your Shed. See the "Anchoring the Shed" step at the end of this Owner's Manual.

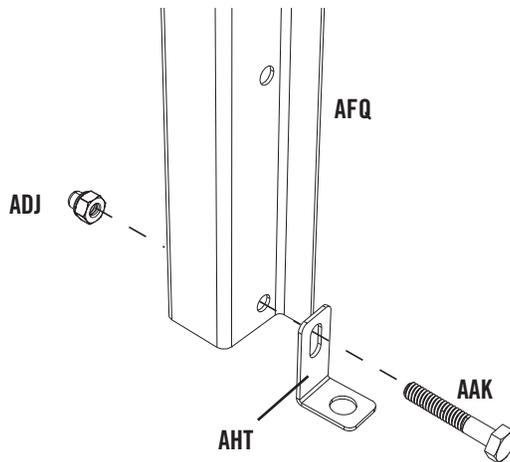


SEC 4 WALL PANEL INSTALLATION

HARDWARE REQUIRED

HARDWARE BAG REQUIRED: BUB

Hardware shown at actual size



ADZ (x62)
1/4" x 5/8" Pan-Head Screw





ADZ (x65)
#2 Phillips Bit

METAL PARTS REQUIRED

METAL KIT BOX REQUIRED: BUA

Part shown at 8% of actual size




AFR (x4)
Corner Channel

PLASTIC PARTS REQUIRED


LOCATED IN BOX: 2

Parts shown at 4% of actual size

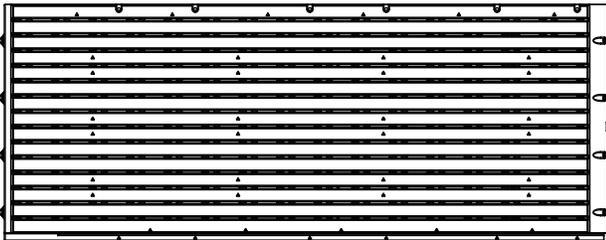

AHD (x8)
Wall Panel

TOOLS REQUIRED



#2 Phillips Screwdriver



3/8" Wrench



ADZ (x65)
#2 Phillips Bit (Included)



Safety Glasses



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE

SEC 4




SEC

WALL ASSEMBLY

4.1


Lock a **Wall Panel (AHD)** to the front, right corner of the Floor by inserting the tabs at the bottom of the Wall Panel into the slots on the Floor. After inserting the tabs, slide the Wall Panel to the left.

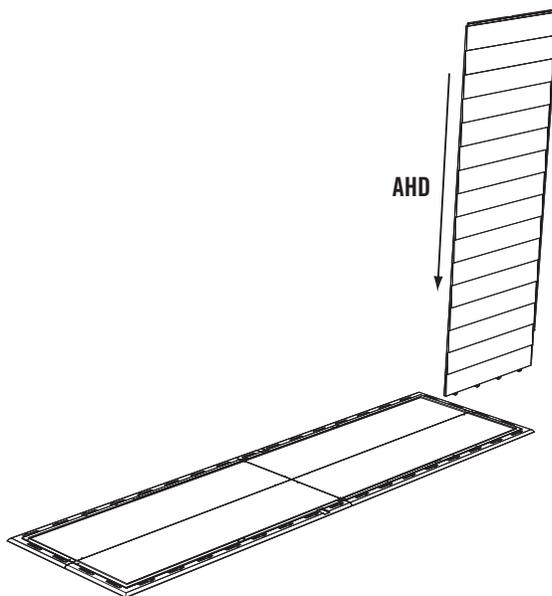

SEC

4.2



Insert a second **Wall Panel (AHD)** to the right edge of the Floor and slide it to the left towards the first Wall Panel.

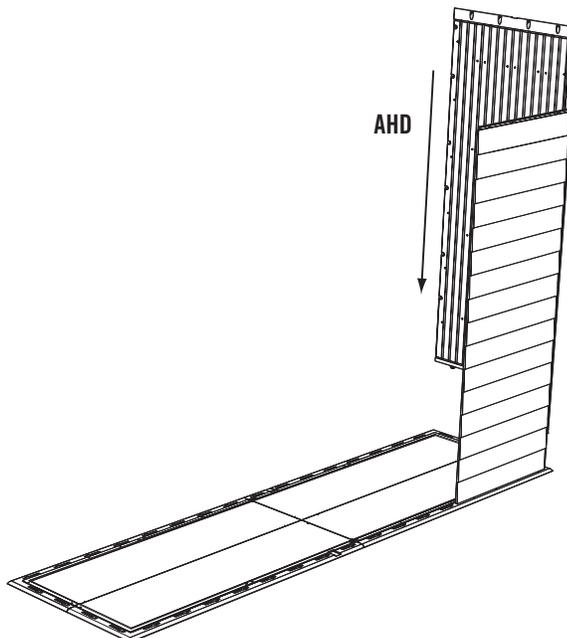



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC. 4




ADZ (x42)



SEC

4.3

Align the holes in a **Corner Channel (AFR)** with the holes in the two Wall Panels and secure the Corner Channel to the Wall Panels using twelve (12) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**. You will perform this step for each corner of the shed.

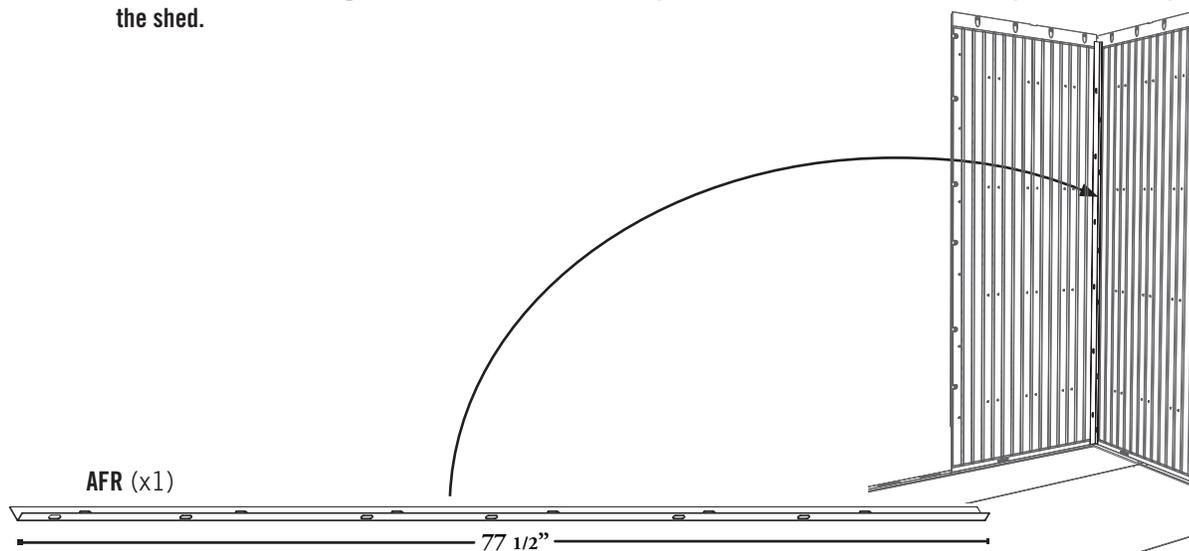


Note: A second adult should apply pressure to the opposite side of the wall for easy insertion of screws.

SEC



4.4

One at a time, insert the next four (4) **Wall Panels (AHD)** along the rear of the Floor as shown. Align the holes in a **Corner Channel (AFR)** with the holes in the two corner Wall Panels and secure the Corner Channel to the Wall Panels using twelve (12) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**. Align the holes in the Wall Panels and secure using eighteen (18) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

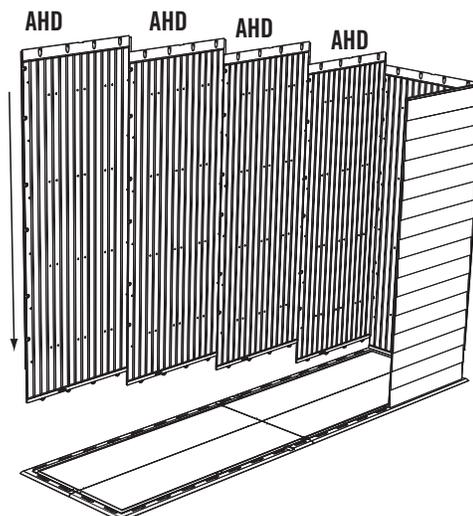



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x30)


SEC 4



SEC

4.5


Insert the next **Wall Panel (AHD)** along the left edge of the Floor as shown. Align the holes in a **Corner Channel (AFR)** with the holes in the two corner Wall Panels and secure the Corner Channel to the Wall Panels using twelve (12) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**. Align the holes in the Wall Panels and secure using six (6) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

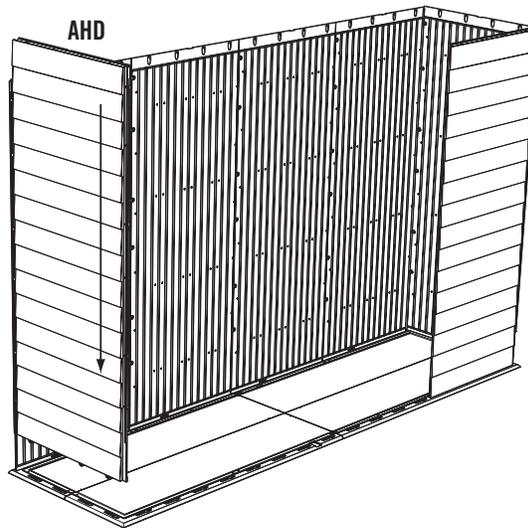

SEC

4.6

Finally, install the last **Wall Panel (AHD)** and **Corner Channel (AFR)** to the front, left corner of the Floor using twelve (12) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

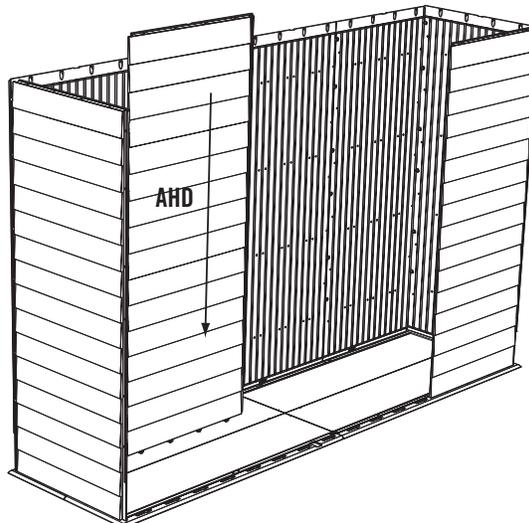


Note: A second adult should apply pressure to the opposite side of the wall for easy insertion of screws.

SEC 5 TRUSS & WALL/SHELF SUPPORT CHANNEL INSTALLATION


HARDWARE REQUIRED

HARDWARE BAG REQUIRED: BUD

Hardware shown at actual size (*Unless noted otherwise)



ADZ (x64)
1/4" x 5/8" Pan-Head Screw
(Not all screws are used)



AAK (x18)
1/4" x 1 1/2" Pan-Head Screw



ADJ (x18)
1/4" Cap Nut



***AHT** (x6)
Floor Bracket


METAL PARTS REQUIRED

METAL KIT BOX REQUIRED: BUA

Parts shown at 8% of actual size



AFQ (x6)
Wall/Shelf Support Channel




AFJ (x2)
Long Extension Channel




AFN (x4)
Short Extension Channel

Part not shown at any particular scale

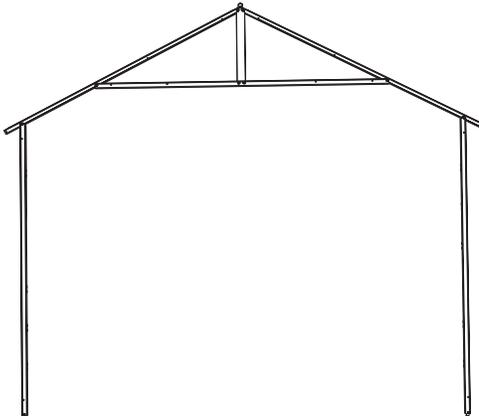

Truss Assembly (x1)

TOOLS REQUIRED





Phillips Screwdriver



Safety Glasses



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x16)

SEC 5




SEC

5.1

TRUSS INSTALLATION

Secure the Truss Assembly to the center of the Wall Panels on the left and right walls with sixteen (16) 1/4" x 5/8" Pan-Head Screws (ADZ).

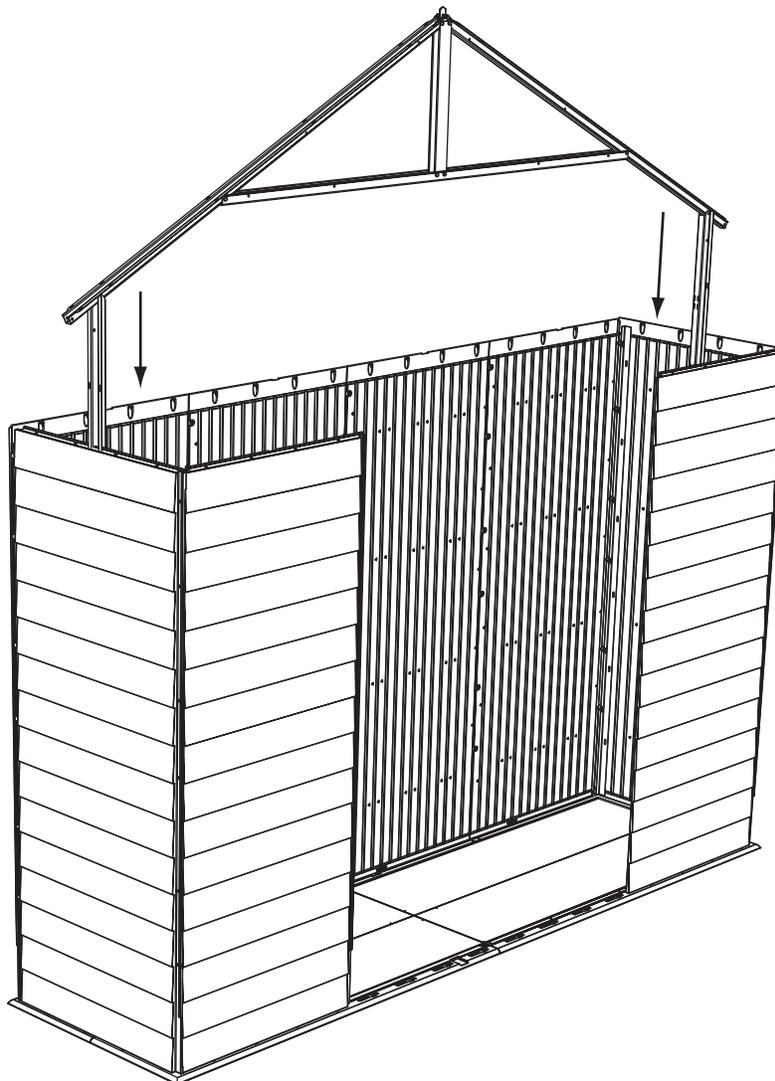




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC. 5




7/16" (x2)



AAK (x12)



ADJ (x12)




SEC

5.2


SHORT WALL SUPPORT CHANNEL EXTENSION ASSEMBLY

Slide a **Short Wall Support Channel Extension (AFN)** into the top of a **Wall Support Channel (AFQ)** and secure with two (2) 1/4" x 1 1/2" **Hex Bolts (AAK)** and two (2) 1/4" **Cap Nuts (ADJ)**. Repeat this step for the remaining three **Short Wall Support Extensions**.

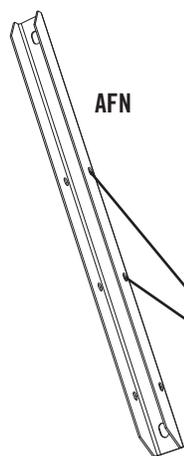

AFN

Use these two holes

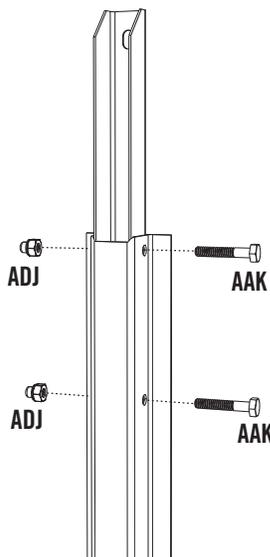


SEC


5.3

LONG WALL SUPPORT CHANNEL EXTENSION ASSEMBLY

Slide a **Long Wall Support Channel Extension (AFJ)** into the top of a **Wall Support Channel (AFQ)** and secure with two (2) 1/4" x 1 1/2" **Hex Bolts (AAK)** and two (2) 1/4" **Cap Nuts (ADJ)**. Repeat this step for the remaining **Long Wall Support Extensions**.

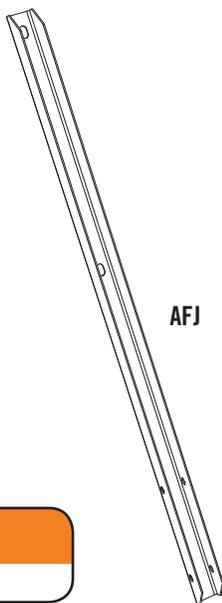

AFJ

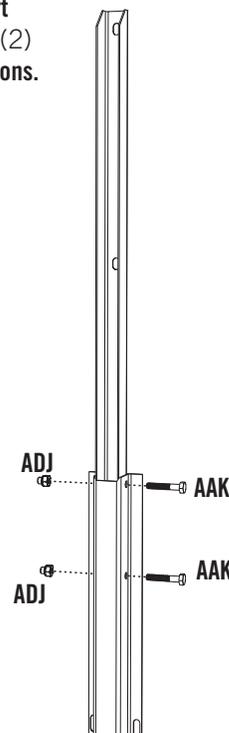

WARNING

Do not overtighten the Cap Nut.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 5



7/16" (x2)



AAK (x6)



ADJ (x6)




AHT (x6)
(Not to scale)



SEC

5.4

Attach one **Floor Bracket (AHT)** to the bottom of each Wall Support Channel. Tighten all hardware. **Repeat this section for all Trusses.** You need only do this step if you plan to anchor your Shed. See the "Anchoring the Shed" step at the end of your Owner's Manual.


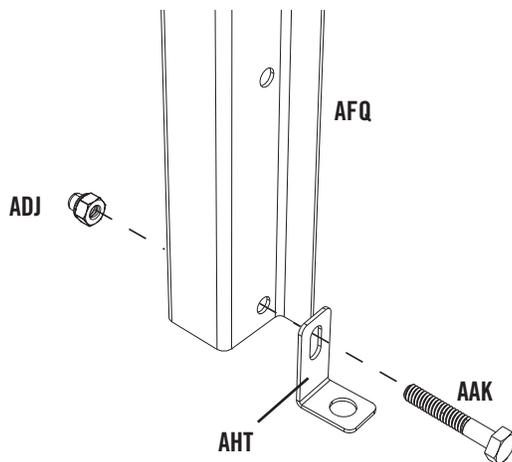


WARNING

Do not overtighten the Cap Nut.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x16)

SEC. 5




SEC

5.5

FRONT WALL SUPPORT CHANNEL INSTALLATION



Using the middle set of eight pre-made holes in the Left, Front Wall Panel, secure a Short Wall Support Channel Assembly to the Left, Front Wall Panel using eight (8) 1/4" x 5/8" Pan-Head Screws (ADZ). Repeat this step for the Right, Front Wall Panel.

Middle set of eight pre-made holes

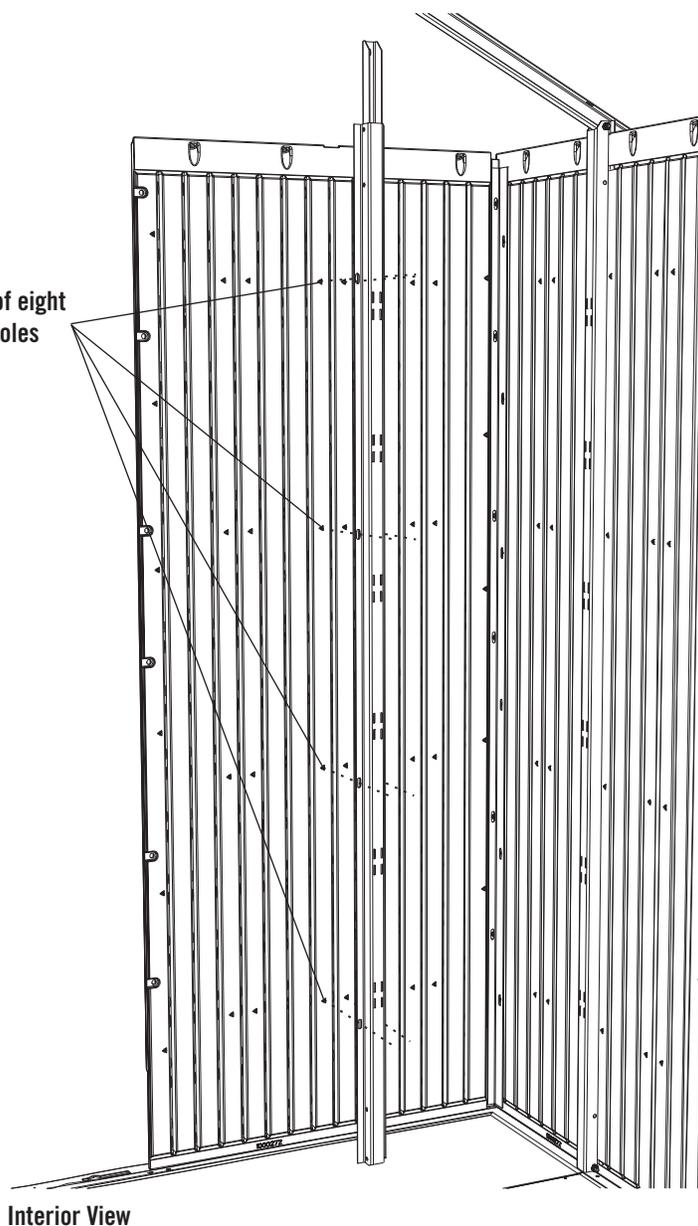



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x32)

SEC 5




SEC

5.6

REAR WALL SUPPORT CHANNEL INSTALLATION

Using the middle set of eight pre-made holes in the right, rear Wall Panel, secure a Short Wall Support Channel Assembly to the right, rear Wall Panel using eight (8) $1/4" \times 5/8"$ Pan-Head Screws (ADZ). Repeat this step for the Left, Rear Wall Panel (Not shown). Using the middle set of eight pre-made holes in the two Center, Rear Wall Panels, secure Long Wall Support Channel Assemblies to the center, rear Wall Panels using eight (8) $1/4" \times 5/8"$ Pan-Head Screws (ADZ) for each Wall Support Channel Assembly.

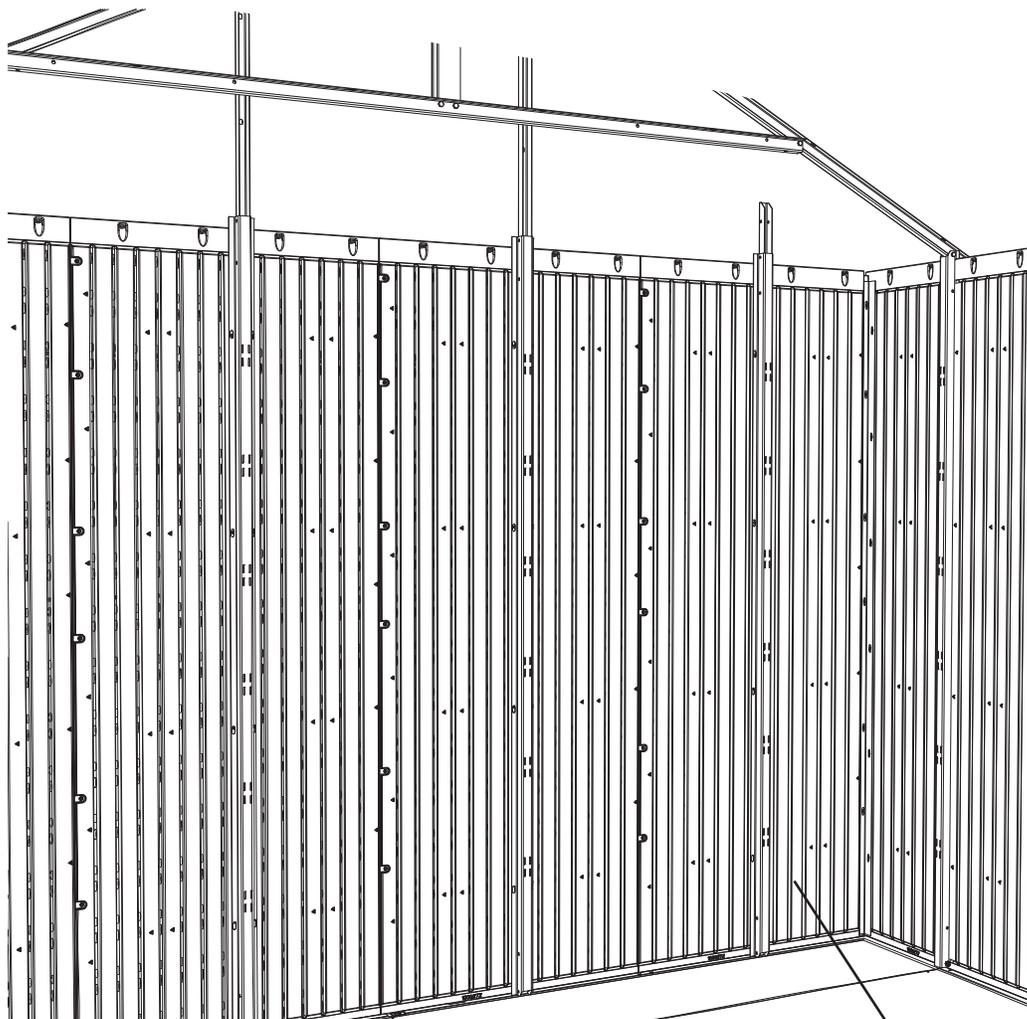

Interior View


Right, Rear Wall Panel

SEC 6 LEFT DOOR ASSEMBLY


HARDWARE REQUIRED

HARDWARE BAG REQUIRED: BKB


Hardware shown at of actual size



ADZ (x9)
1/4" x 5/8" Pan-Head Screw




ADW (x3)
#10 x 3/4" Phillips Pan-Head Screw



ACH (x2)
1/4" x 1 1/2" Carriage Bolt



ADJ (x2)
1/4" Cap Nut




AEE (x3)
#10 x 1/2" Flat Washer

Hardware shown at 15% of actual size




AHZ (x1)
Left Door Handle


Hardware shown at 25% of actual size



AHM (x2)
Deadbolt Latch



AIB (x1)
Left Door Strike Plate




AIA (x1)
Left Door Lock Bracket

METAL PARTS REQUIRED

Parts shown at 8% of actual size




AFC (x1)
Door End Channel



AFB (x3)
Door Brace


PLASTIC PARTS REQUIRED

Part shown at 4% of actual size

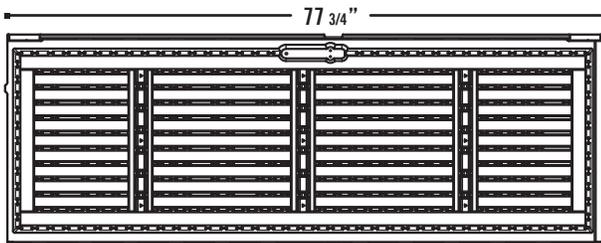

AGO (x1)
Left Door

TOOLS REQUIRED



Phillips Screwdriver



7/16" Wrench




Safety Glasses



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 6




AHM (x2)

SEC

LEFT DOOR ASSEMBLY

6.1

Rest **Left Door (AGO)** with front side down. Position **Deadbolt Latches (AHM)** in slots at top and bottom of Door then slide **Door End Channel (AFC)** onto the Door.


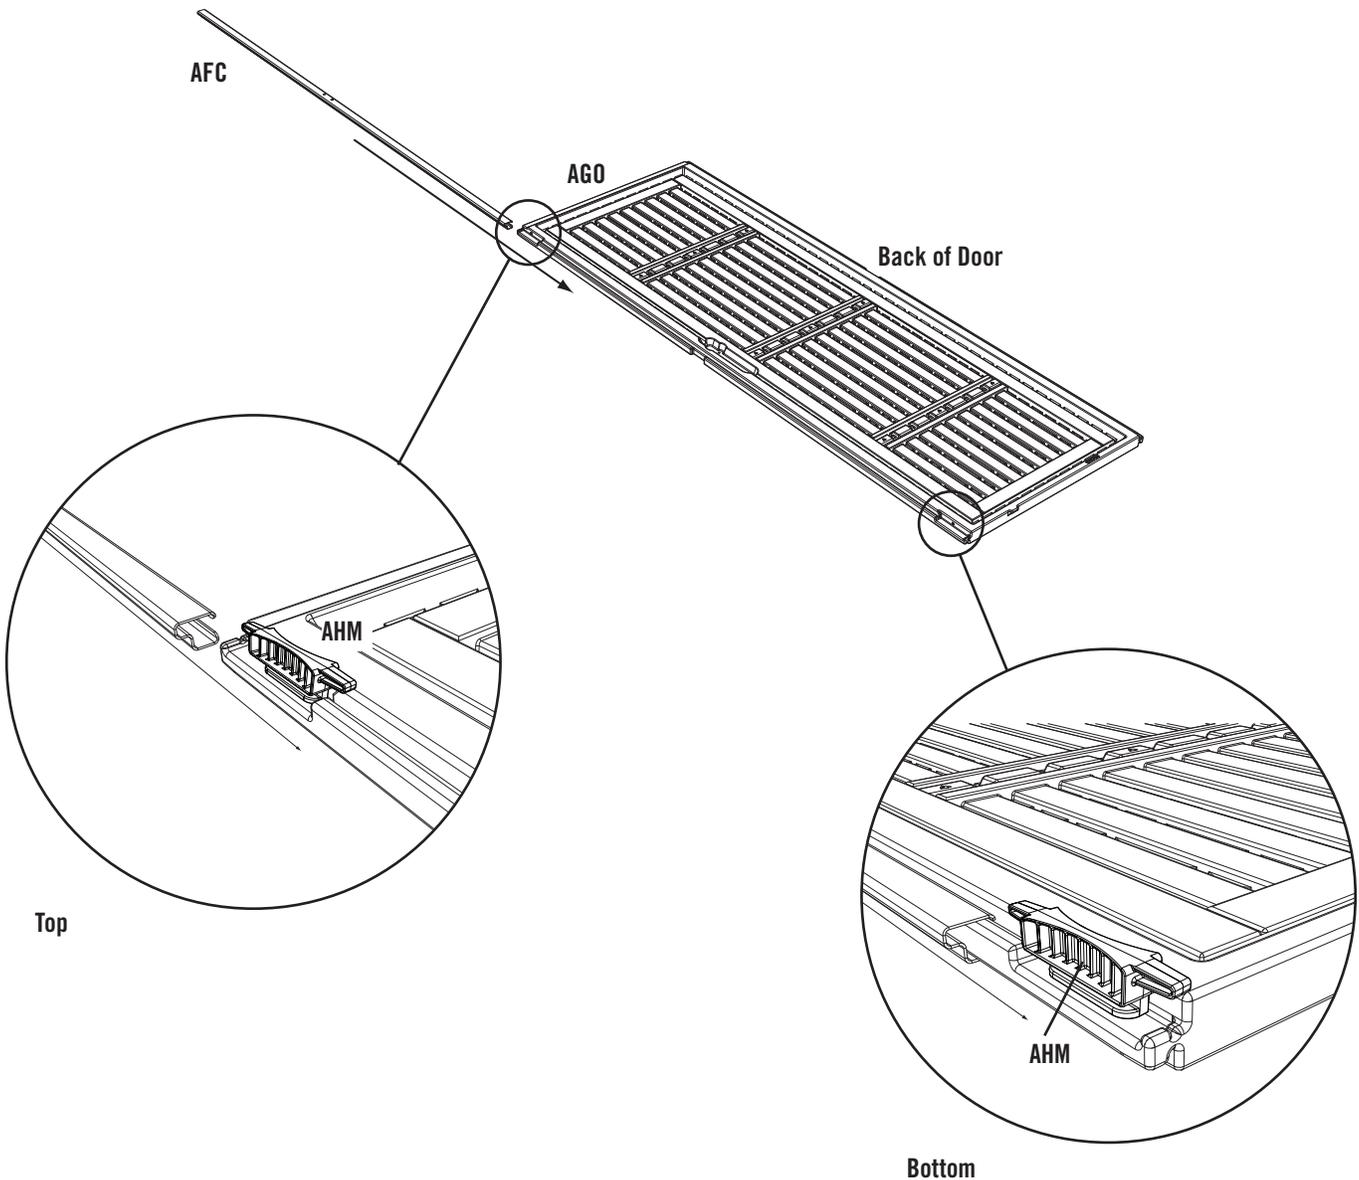


Note: The Door End Channel fits onto Door with the flat side up (facing the Deadbolt Latches).




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC. 6



ADZ (x9)




AIB (x1)



SEC

6.2


Attach three **Door Braces (AFB)** to the back of the Door with **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

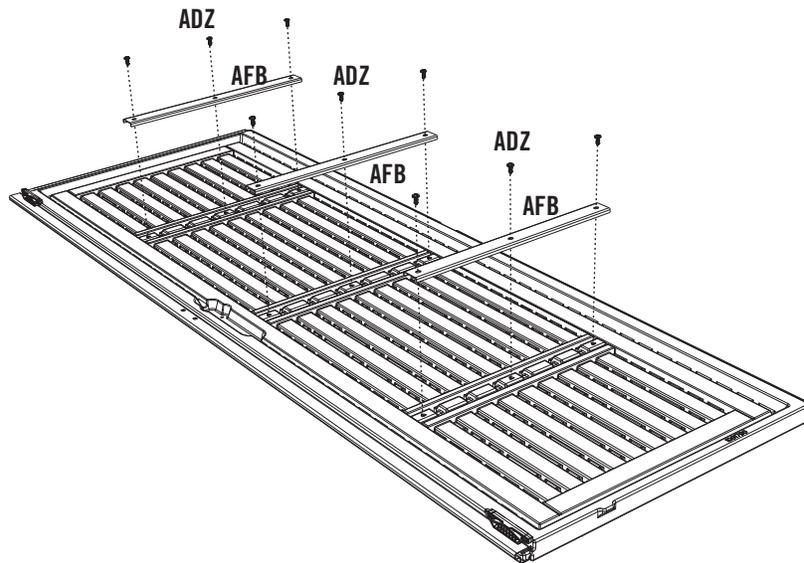

SEC

6.3


Slip the **Left Door Strike Plate (AIB)** over the Left Door and align the holes.

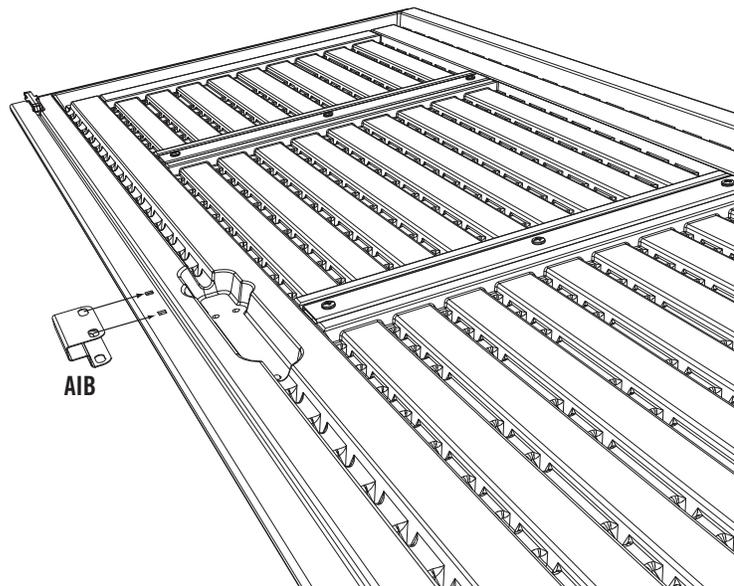


Note: You may need to nudge the Door End Channel to make these holes line up with the gap in the Door.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




7/16"




ACH (x2)



ADJ (x2)



AIA (x1)



ADW (x3)



AEE (x3)



AHZ (x1)


SEC 6



SEC

6.4


Attach the **Left Door Lock Bracket (AIA)** to the Strike Plate with two (2) **1/4" x 1 1/2" Carriage Bolts (ACH)** and two (2) **1/4" Cap Nuts (ADJ)**.

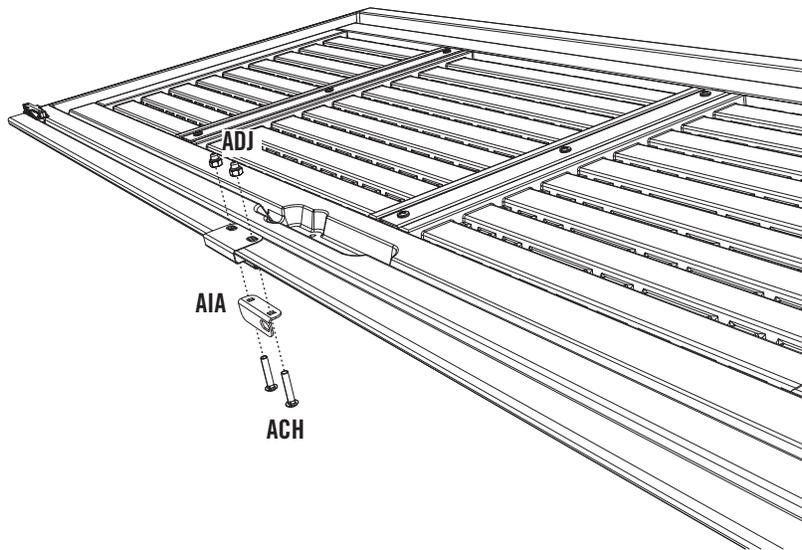

SEC

6.5

Attach the **Left Door Handle (AHZ)** using three (3) **#10 x 1/2" Flat Washers (AEE)** and three (3) **#10 x 3/4" Pan-Head Screws (ADW)**.

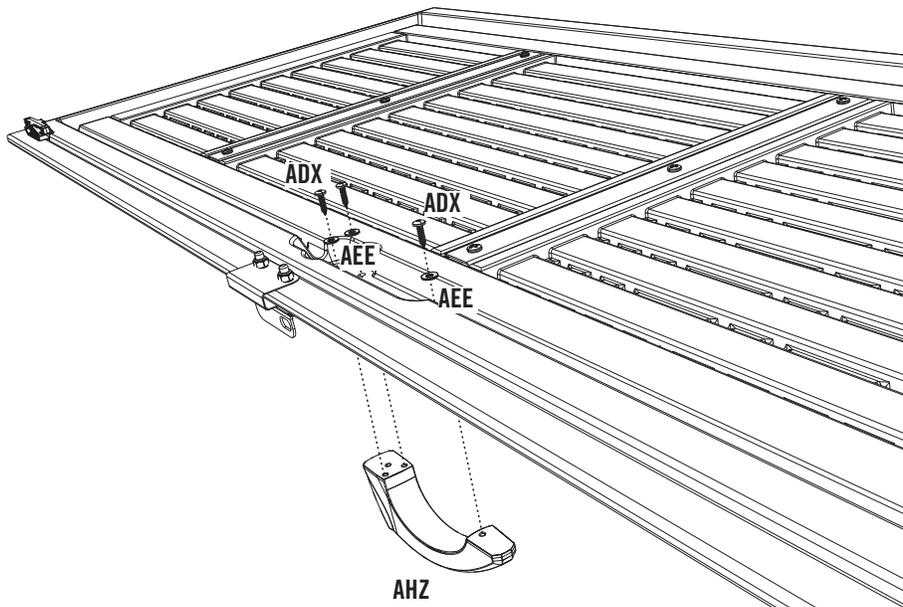


SEC 7 RIGHT DOOR ASSEMBLY


HARDWARE REQUIRED

HARDWARE BAG REQUIRED: BKC


Hardware shown at of actual size



ADZ (x9)
1/4" x 5/8" Pan-Head Screw




ADW (x4)
#10 x 3/4" Pan-Head Screw




AEE (x3)
#10 x 1/2" Flat Washer




ADB (x2)
3/8" x 1/2" Steel Spacer




AHY (x1)
Latch Spring



ACI (x2)
1/4" x 2" Carriage Bolt




AAB (x2)
1/4" Centerlock Nut




AEB (x2)
1/4" Flat Washer

Hardware shown at 25% of actual size



AIO (x1)
Thumb Lever



AHV (x1)
Door Latch




AIL (x1)
Right Door Lock Bracket




AHX (x1)
Latch Cover Plate

Hardware shown at 15% of actual size



AIK (x1)
Right Door Handle

Hardware shown at 50% of actual size



AHW (x1)
Latch Block


METAL PARTS REQUIRED

METAL KIT BOX REQUIRED: BIA

Parts shown at 8% of actual size



AFC (x1)
Door End Channel




AFB (x3)
Door Brace

PLASTIC PARTS REQUIRED


LOCATED IN BOX- 2

Part shown at 4% of actual size

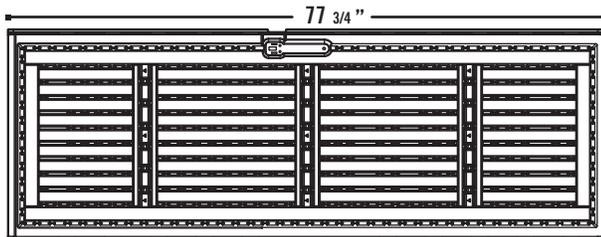

AGZ (x1)
Right Door

TOOLS REQUIRED



Phillips Screwdriver



7/16" Wrench



Pliers



Safety Glasses



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE

SEC 7




SEC

RIGHT DOOR ASSEMBLY

7.1



Rest **Right Door (AGZ)** with front side down, then slide **Door End Channel (AFC)** onto the Door.

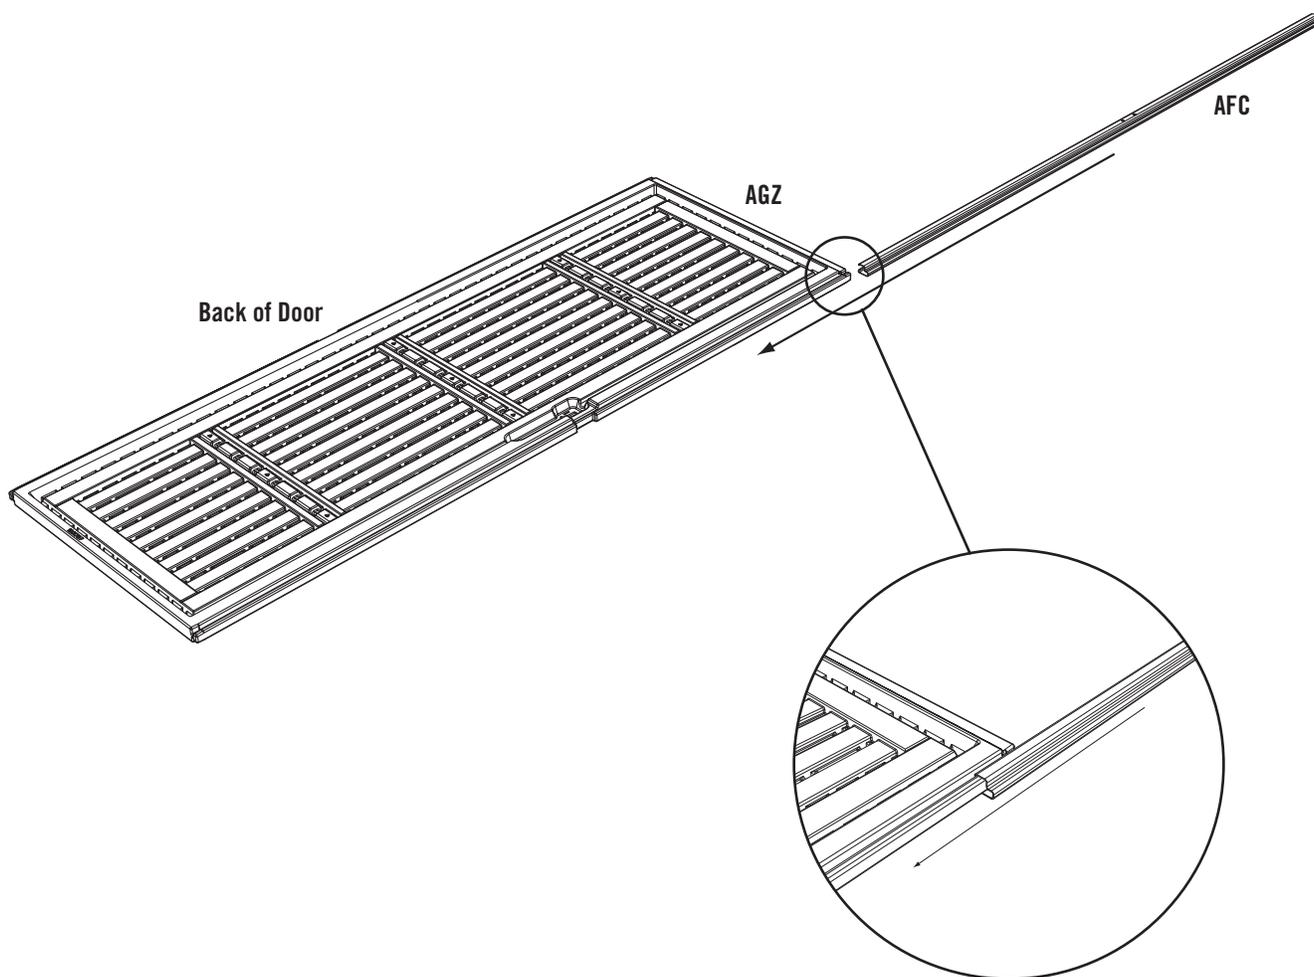




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE


SEC. 7



ADZ (9)



AIO (x1)




AIK (x1)



SEC

7.2


Attach three **Door Braces (AFB)** to the back of the Door with nine (9) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

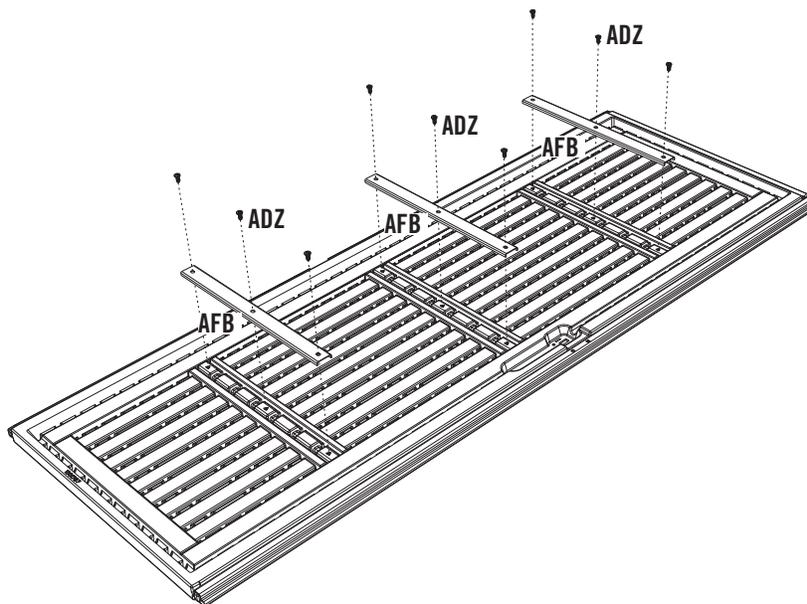

SEC


7.3

Fit the **Thumb Lever (AIO)** knobs into the grooves in the **Right Door Handle (AIK)**.


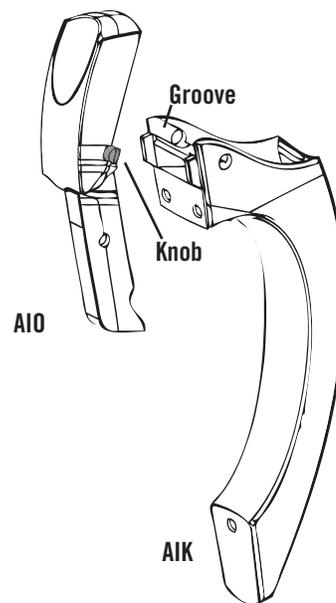




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AEE (x3)



ADW (x3)


SEC 7



SEC

7.4


Rotate the Thumb Lever into the Handle. Slide forward until the Knobs fit into the holes in the Handle.

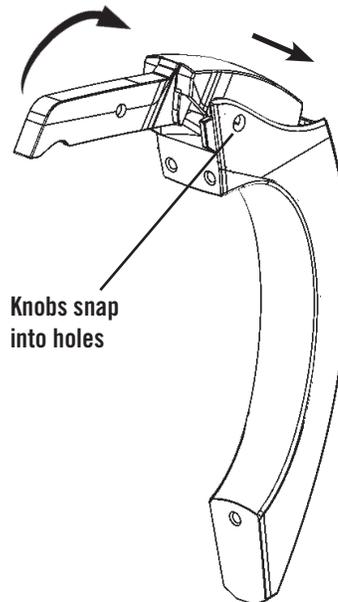

SEC

7.5


Attach the Handle and Thumb Lever to the Door using the required hardware.

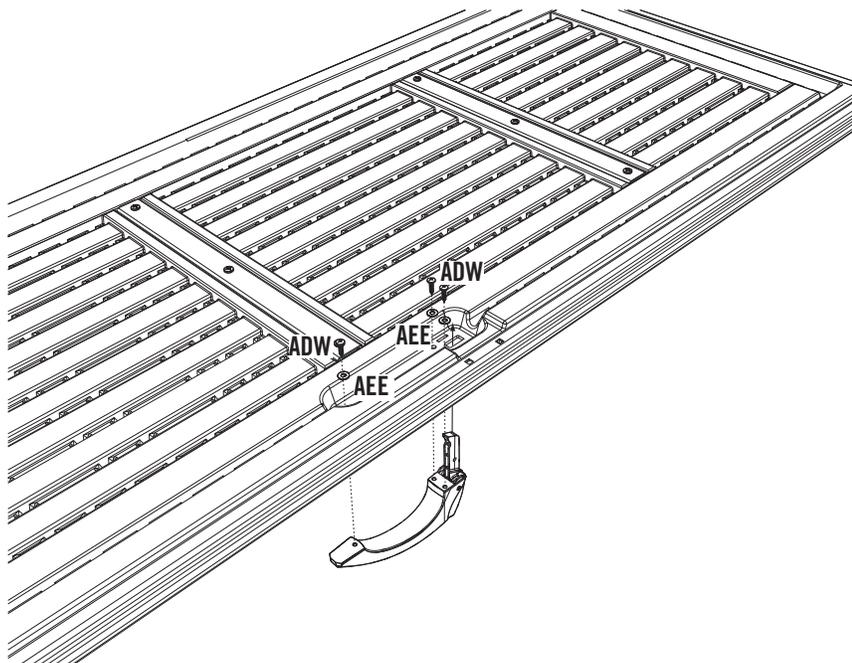




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE


SEC. 7




7/16"



AHX (x1)
(Not to scale)




AHV (x1)
(Not to scale)




AAB (x2)



AEB (x2)



ACI (x2)



AIL (x1)
(Not to scale)




ADB (x2)



SEC



7.6

Connect the Right Door Handle to the Right Door using the hardware shown. Tighten all hardware.

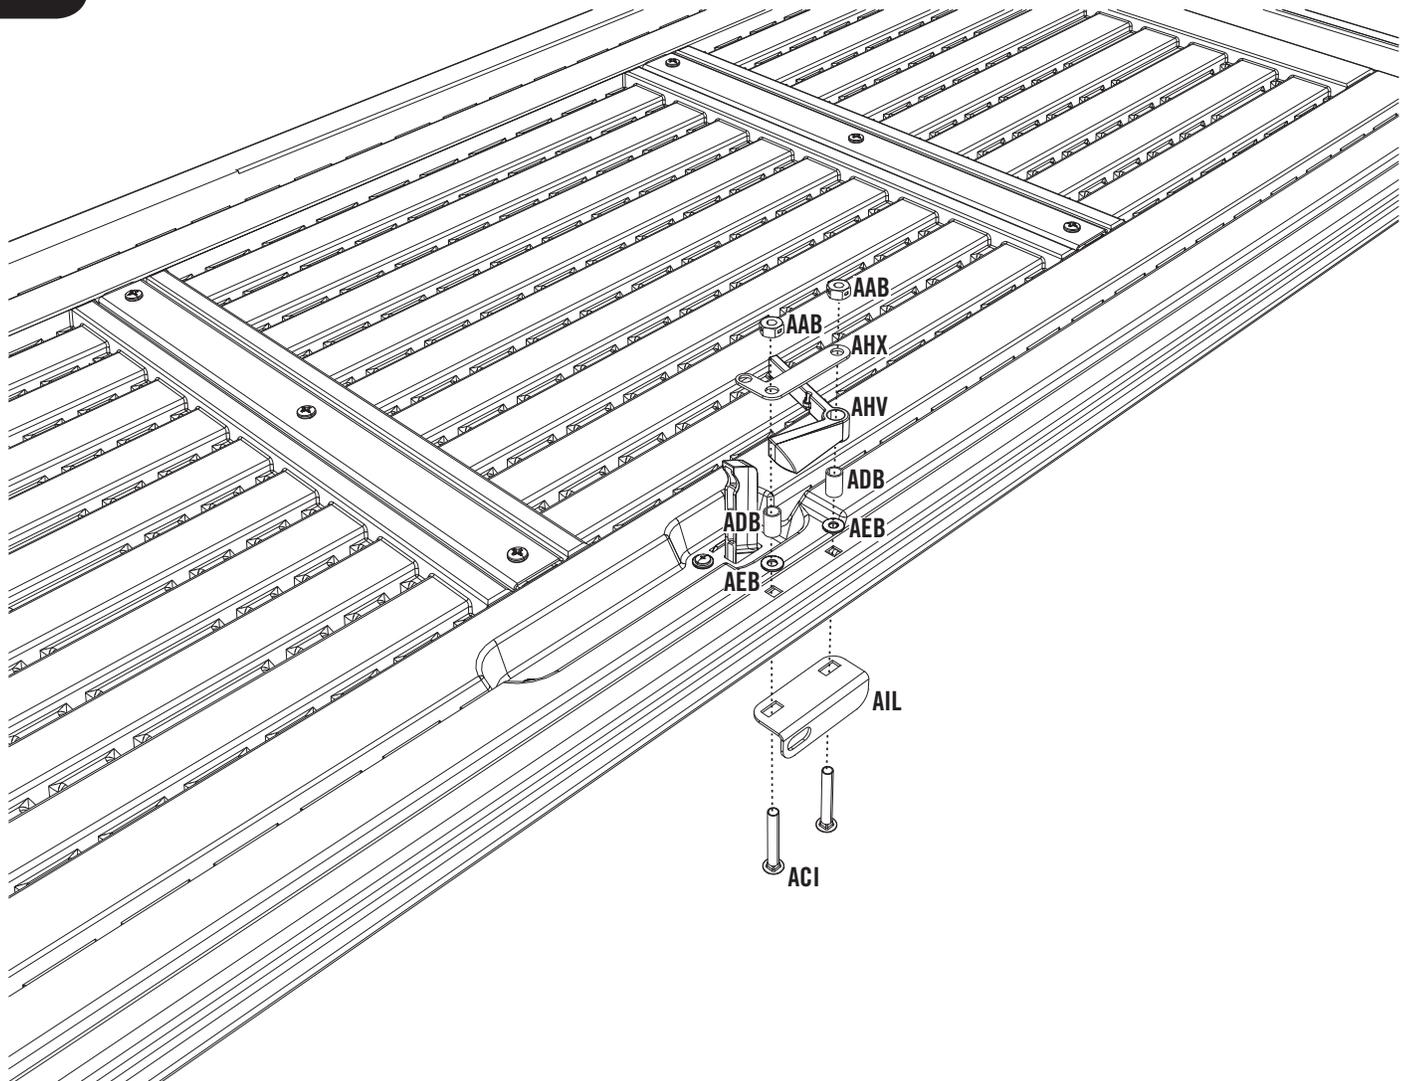





TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

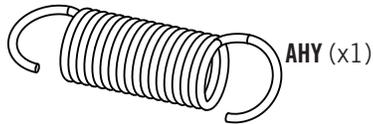

AHY (x1)



AHW (x1)
(Not to scale)



ADW (x1)


SEC 7



SEC

7.7

Line up the hole in the **Latch Block (AHW)** with the hole in the **Thumb Lever (AIO)**, and secure in place with a **#10 x 3/4" Phillips Pan-Head Screw (ADW)**.

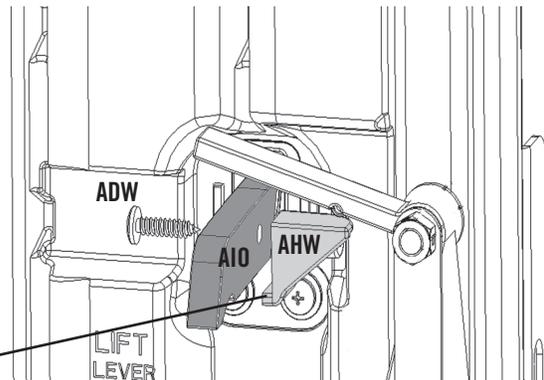


Note: The lip of the Latch Block (AHW) fits under the Thumb Lever (AIO).

SEC

7.8

Attach **Latch Spring (AHY)** to handle assembly. Set the Door aside.

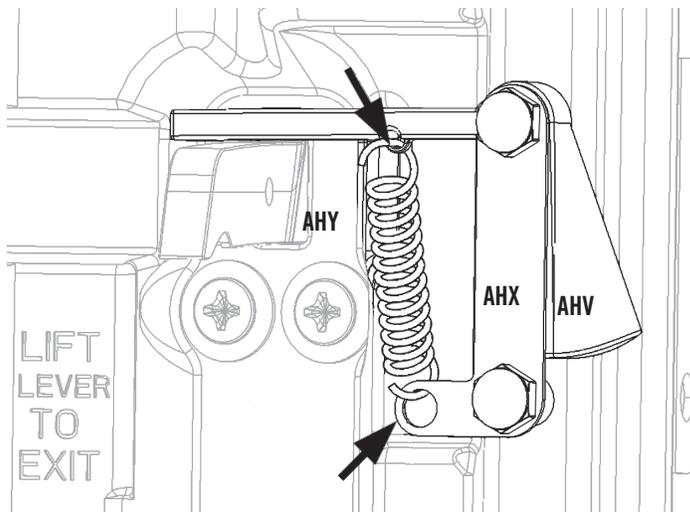

Note: The Latch Block and Thumb Lever are not shown in this illustration in order to better show the correct placement of the Latch Spring.



Note: Use pliers to pull spring down and hook into bottom hole.



WARNING


While performing this step, each person should use protective eye glasses to help prevent serious eye injury.

SEC 8 GABLE ASSEMBLY


HARDWARE REQUIRED

HARDWARE BAG REQUIRED: BNA (x2)


Hardware shown at actual size



AEE (x10)
#10 x 1/2" Flat Washer




ADW (x10)
#10 x 3/4" Pan-Head Screw




ADZ (x8)
1/4" x 5/8" Pan-Head Screw

Parts shown at 15% of actual size



AGP (x2)
Louvered Vent




AIQ (x2)
Vent Screen


PLASTIC PARTS REQUIRED

LOCATED IN BOX: 1

Parts shown at 4% of actual size

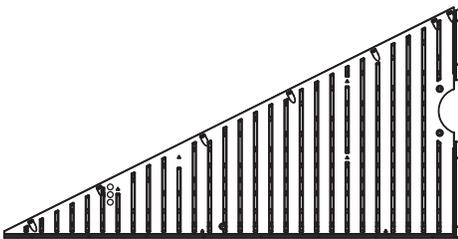


AGH (x2)
Gable Half 1

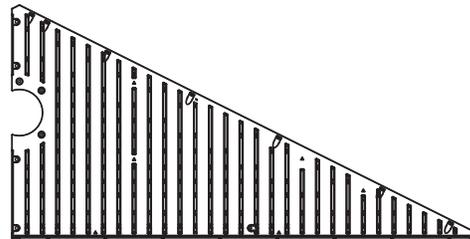

AGI (x2)
Gable Half 2

TOOLS REQUIRED




Phillips Screwdriver



Safety Glasses



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x8)

SEC 8




SEC

8.1

GABLE ASSEMBLY


Set the edge of **Gable Half 2 (AGI)** over the edge of **Gable Half 1 (AGH)** as shown.

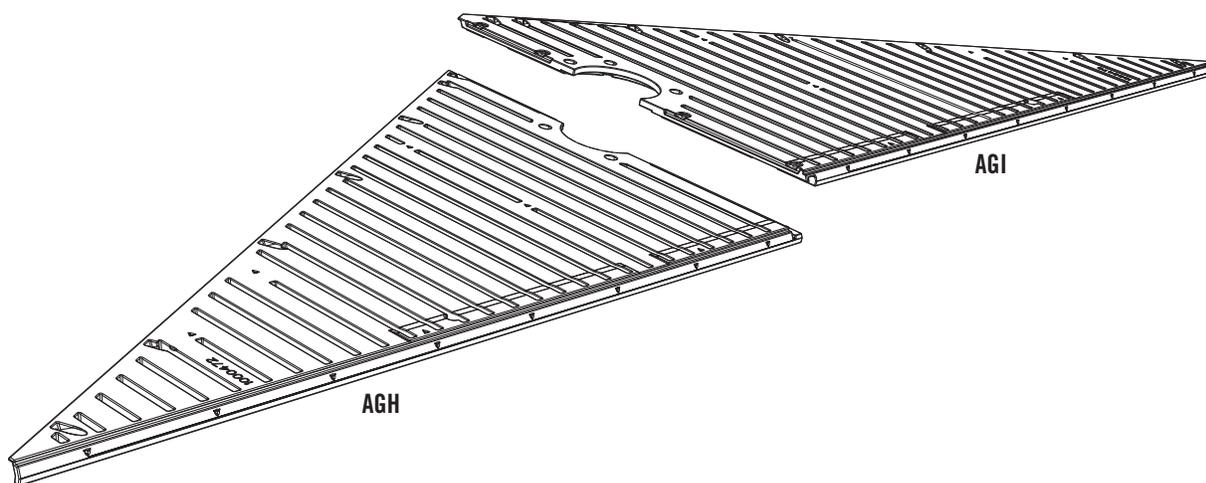

SEC


8.2

Secure the two Gable Halves together using four (4) 1/4" x 5/8" Pan-Head Screws (ADZ).

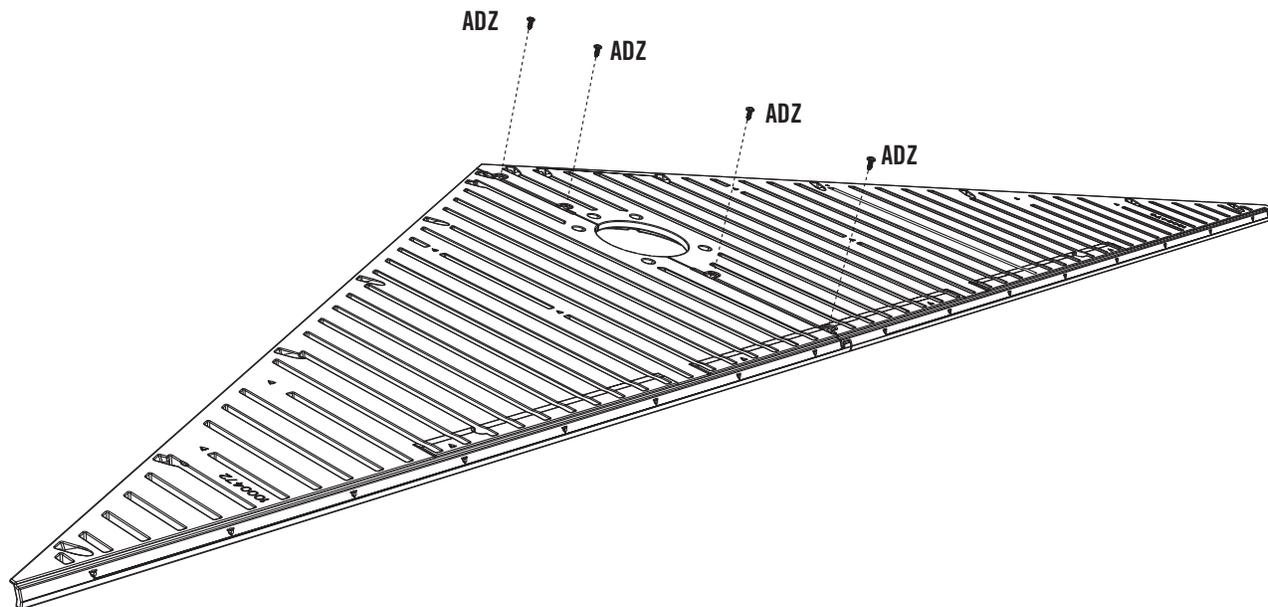



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AEE (x10)



ADW (x10)


SEC 8



SEC

8.3


Attach the Louvered Vent (AGP) and Vent Screen (AIQ) to the Gable Assembly using five (5) #10 x 1/2" Flat Washers (AEE) and five (5) #10 x 3/4" Phillips Pan-Head Screws (ADW). Set the Gable Assembly aside until later. Repeat this section for the second Gable.

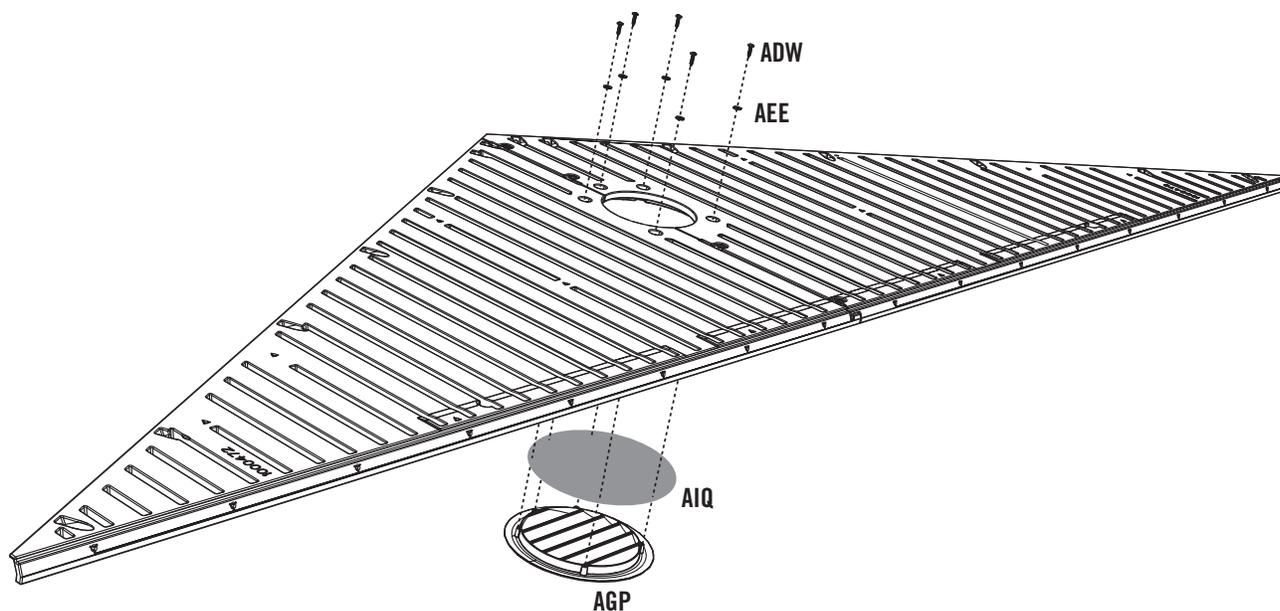


SEC 9 DOOR & ENTRY GABLE INSTALLATION

HARDWARE REQUIRED


Hardware shown at actual size (*Unless noted otherwise)



ADZ (x24)
1/4" x 5/8" Pan-Head Screw



ACH (x4)
1/4" x 1 1/2" Carriage Bolt




ADX (x2)
#10 x 1/2" Pan-Head Screw




ADJ (x8)
1/4" Cap Nut




***AHL (x1)**
Dead Bolt Strike Plate



***AHN (x2)**
Floor Bracket




ACA (x4)
1/4" x 1/2" Carriage Bolt





AEB (x4)
1/4" Flat Washer

METAL PARTS REQUIRED


Parts shown at 8% of actual size



AFI (x2)
Left Hinge Assembly



AFK (x2)
Right Hinge Assembly




DOOR HINGE PARTS KIT REQUIRED: BTI


PLASTIC PARTS REQUIRED

Parts shown at 4% of actual size

FROM SECTIONS 6, 7, & 8

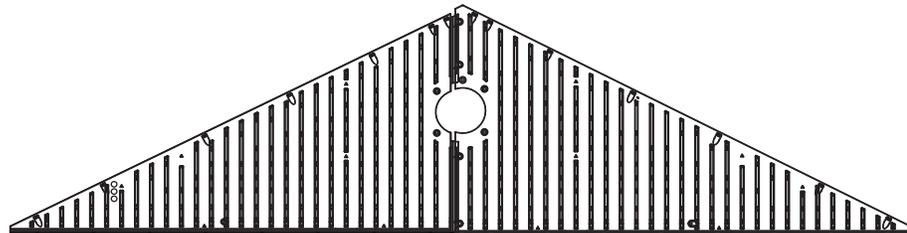


Front Gable Assembly
77 3/4"

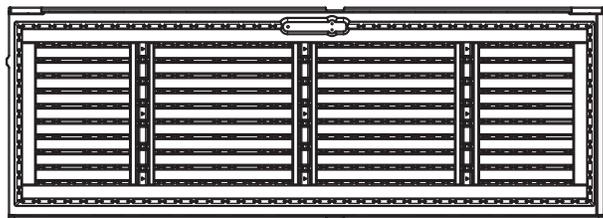

Left Door Assembly

Rear View

Rear View

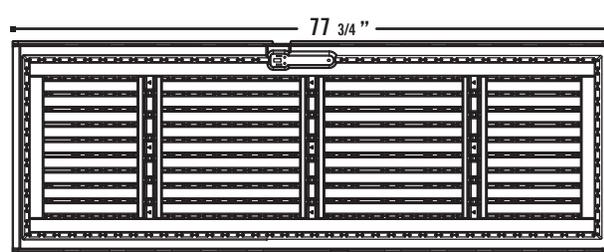

Right Door Assembly

Rear View

TOOLS REQUIRED



Phillips Screwdriver




Pliers



Safety Glasses



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**SEC 9**


2 ADULTS REQUIRED FOR THESE STEPS

SEC



FRONT GABLE INSTALLATION

9.1

Set the Front Gable Assembly in front of the two short Wall Support Channels and on the two front Wall Panels as shown.

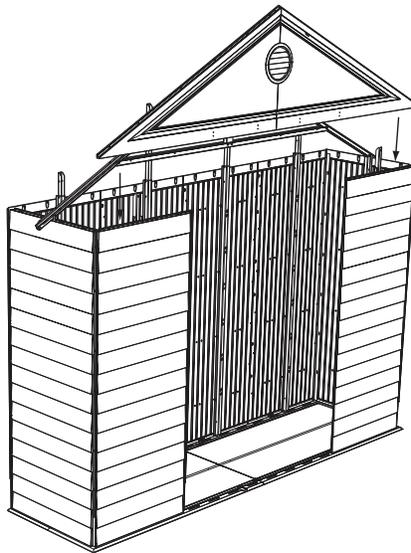**SEC****9.2**


Align the holes in the sides of the Front Gable Assembly with those in the tops of the front Wall Panels and secure with six (8) **1/4" x 5/8" Pan Head Screws (ADZ)** at the locations indicated. Also, secure the Entry Gable Assembly to the Wall Support Channel Extensions using two (2) **1/4" x 5/8" Pan Head Screws (ADZ)**.

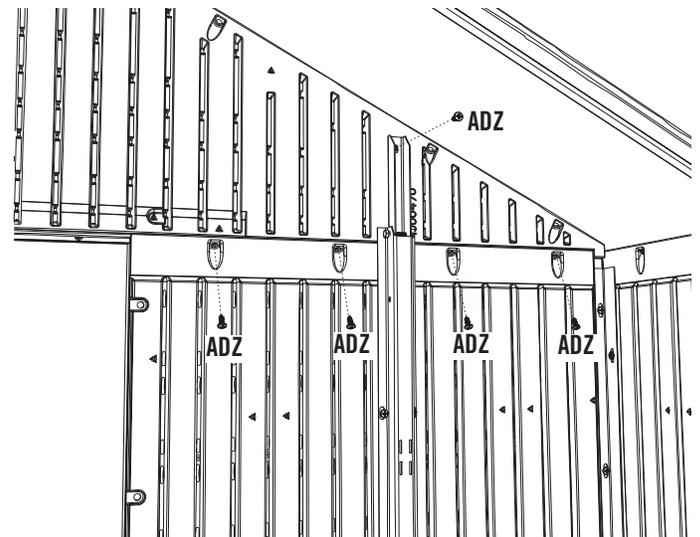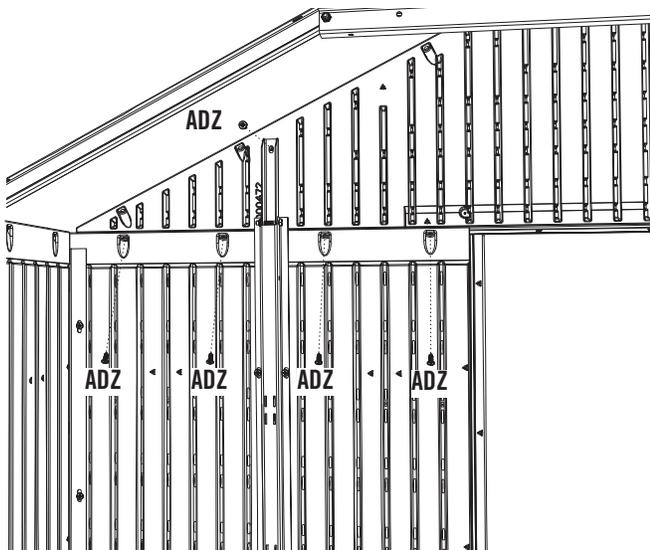




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC. 9



AHN (x2)
(Not to scale)



ACA (x4)



ADJ (x4)




SEC


9.3

DOOR FRAME ASSEMBLY & INSTALLATION


Insert a 1/4" x 1/2" Carriage Bolt (ACA) through the top hole of the Right Door Hinge (AFK) as shown, and secure with a 1/4" Cap Nut (ADJ). Only hand tighten the Cap Nut for now. Repeat this step for the Left Door Hinge (AFI).

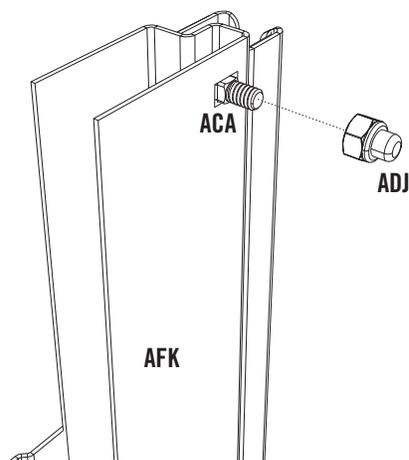

Right Door Hinge

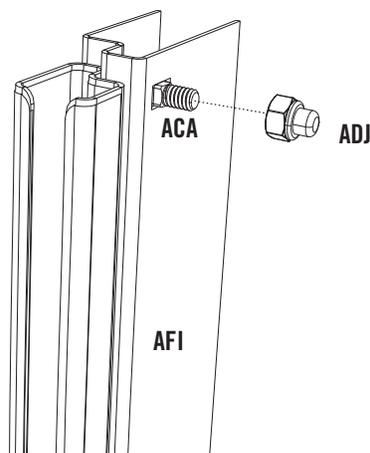

Left Door Hinge




! Note: To help you distinguish between the Left and Right Hinge Assemblies, the Trim Brackets on the Right Hinge Assembly (AFK) start about five inches in from the ends.


SEC

9.4

Attach a Floor Bracket (AHN) to the bottom of the Right Door Hinge using a 1/4" x 1/2" Carriage Bolt (ACA) and a 1/4" Cap Nut (ADJ). Only hand tighten the Cap Nut for now. Repeat this step for the Left Door Hinge (AFI).

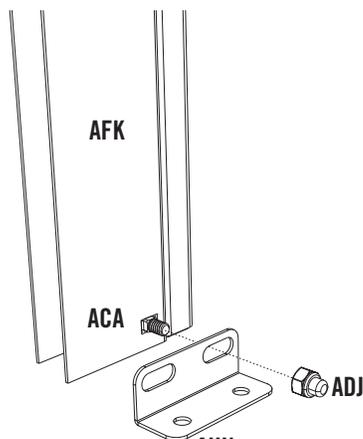



Right Door Hinge

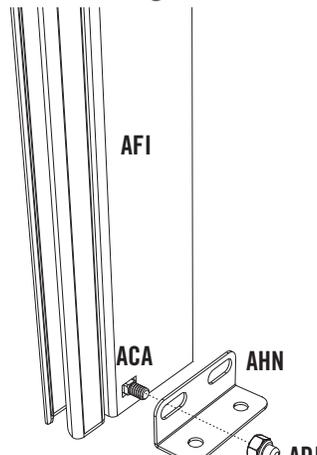

Left Door Hinge



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x5)

SEC 9





SEC

9.5



DOOR FRAME INSTALLATION

Slide the Right Door Hinge Assembly over the right, front Wall Panel and secure the Hinge Assembly to the Wall Panel using five (5) 1/4" x 5/8" Pan-Head Screws (ADZ).

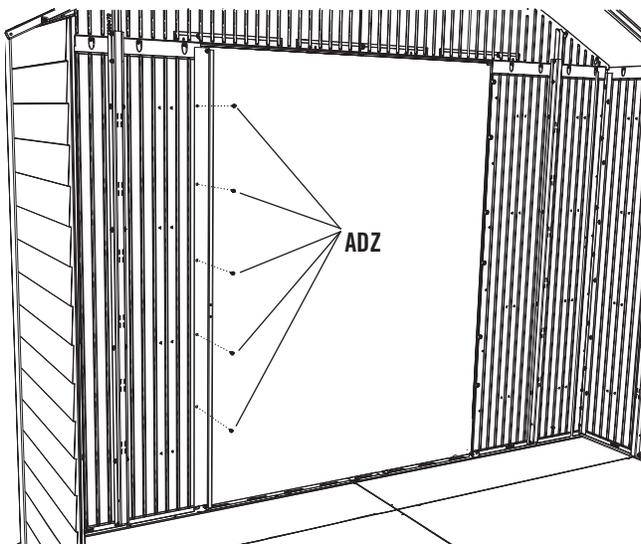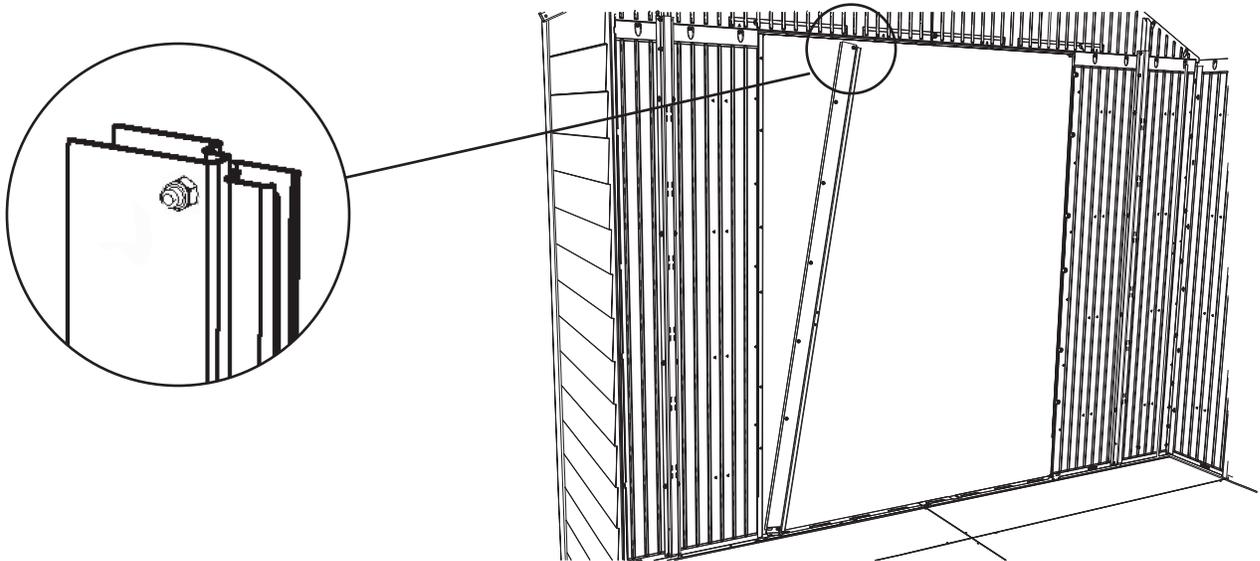



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x5)




SEC. 9



SEC


9.6

Slide the Left Door Hinge Assembly over the left, front Wall Panel and secure the Hinge Assembly to the Wall Panel using five (5) 1/4" x 5/8" Pan-Head Screws (ADZ).

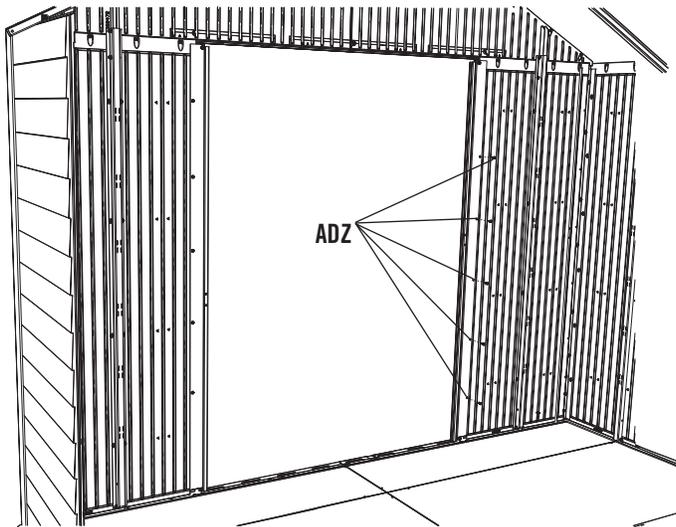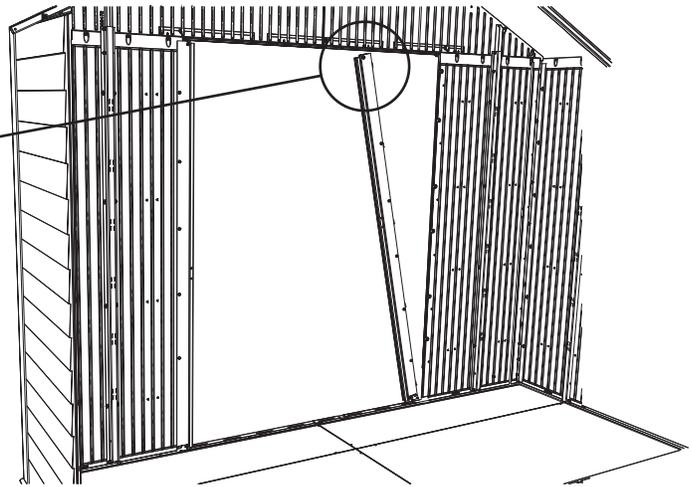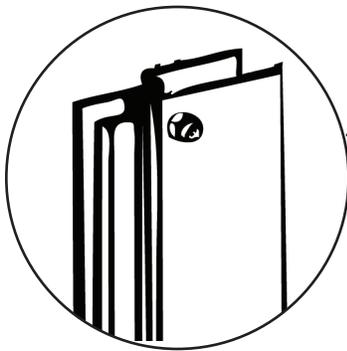



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE






SEC 9



SEC


9.7

Carefully remove the 1/4" Cap Nut from the top of the Left Door Hinge Assembly. Place the Door Header at the top of the Door Hinge Assembly so 1/4" x 1/2" Carriage Bolt goes through the elongated hole on the Door Header as shown. Carefully replace the 1/4" Cap Nut. **Repeat this step for the Right Door Hinge Assembly.** Finally, secure the Door Header to the Front Gable using four (4) 1/4" x 5/8" Pan-Head Screws (ADZ) at the locations shown.

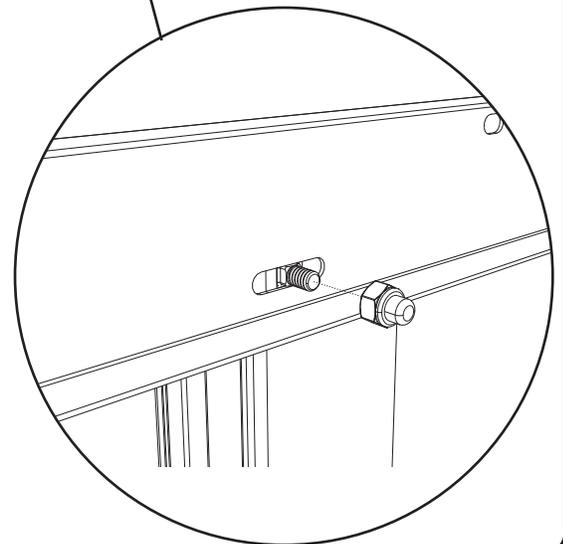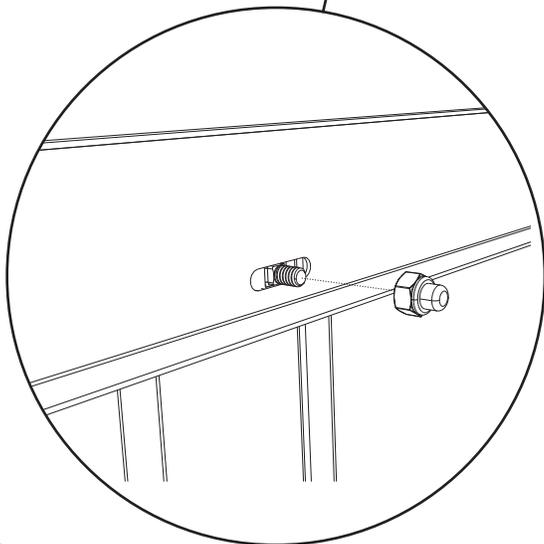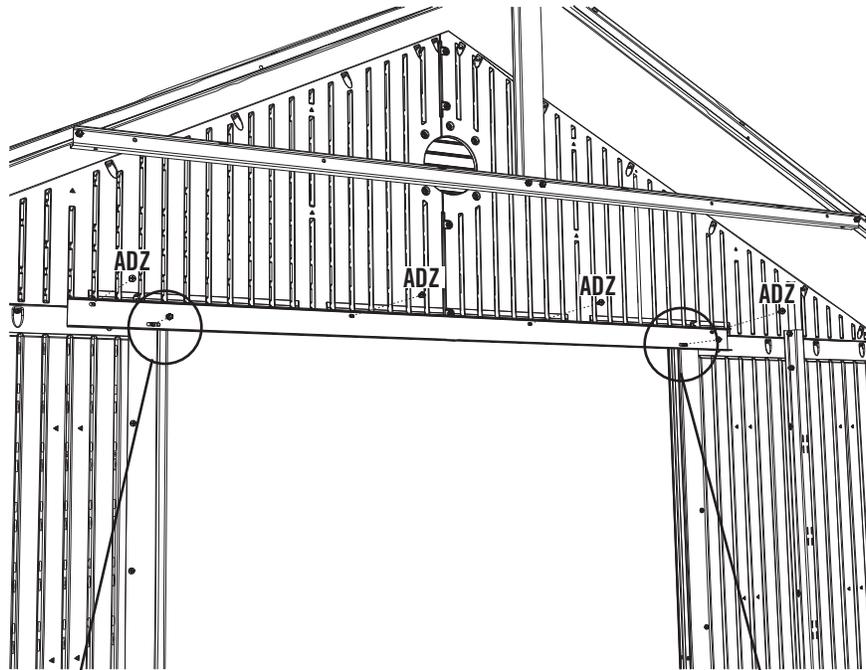



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE

SEC. 9




SEC

9.8



DOOR INSTALLATION

Slide the edge of the Left Door Assembly down into the end of the Left Hinge Assembly as shown.

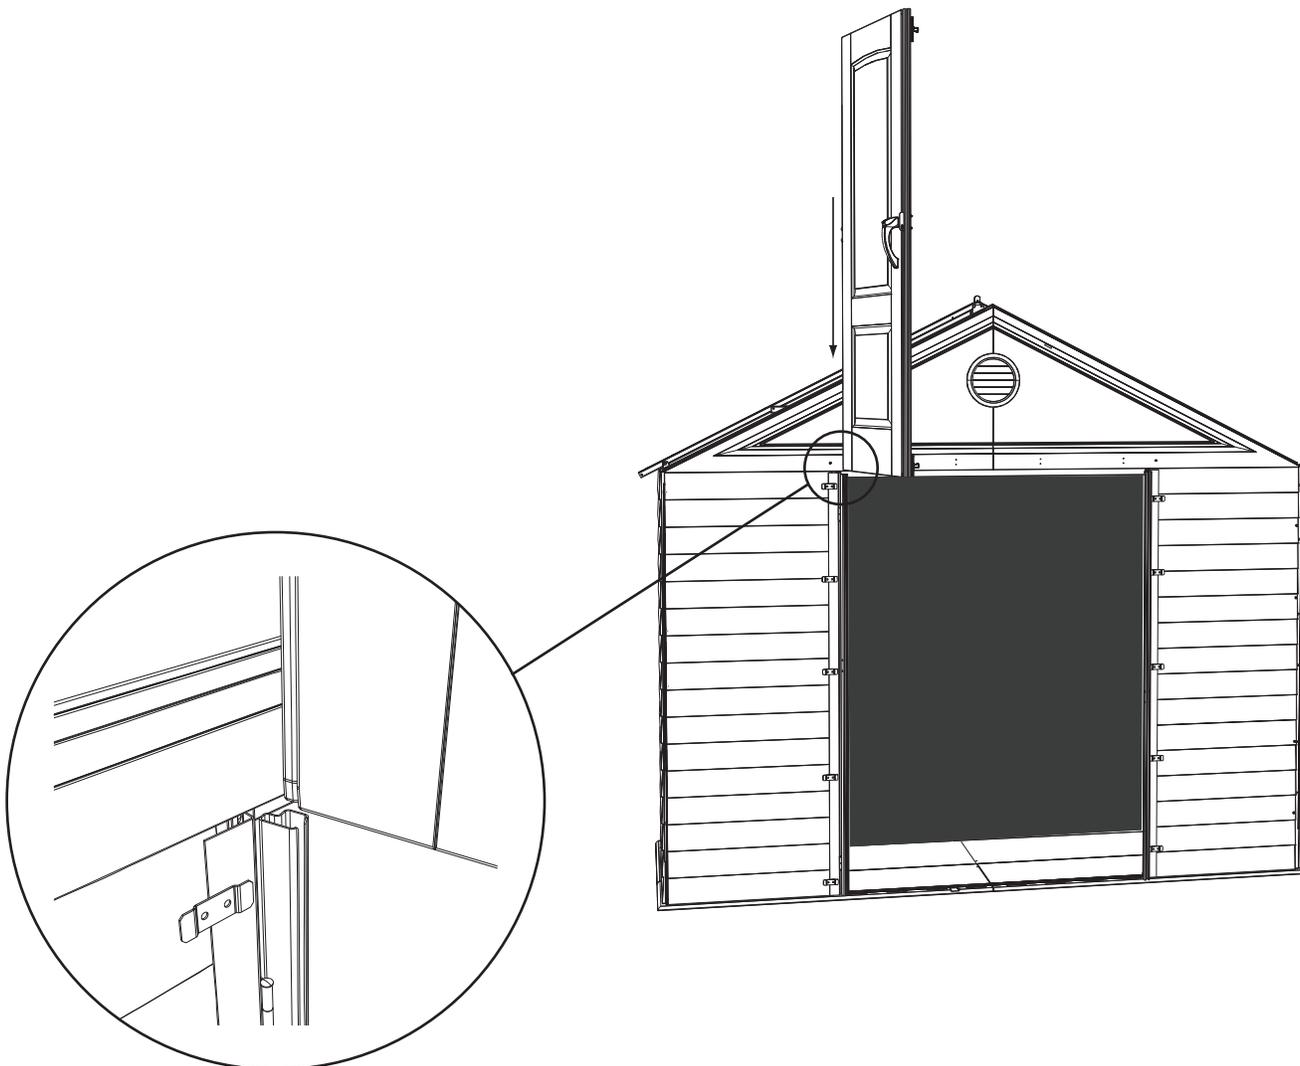




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AEB (x4)



ADJ (x4)



ACH (x4)



SEC 9



SEC

9.9


Align the notch in the Left Door Assembly with the two holes in the end of the Left Hinge Assembly, and insert two (2) 1/4" x 1 1/2" Carriage Bolts (ACH). Secure the Door to the Hinge using two (2) 1/4" Flat Washers (AEB) and two (2) 1/4" Cap Nuts (ADJ). Repeat these steps for the Right Door Assembly.

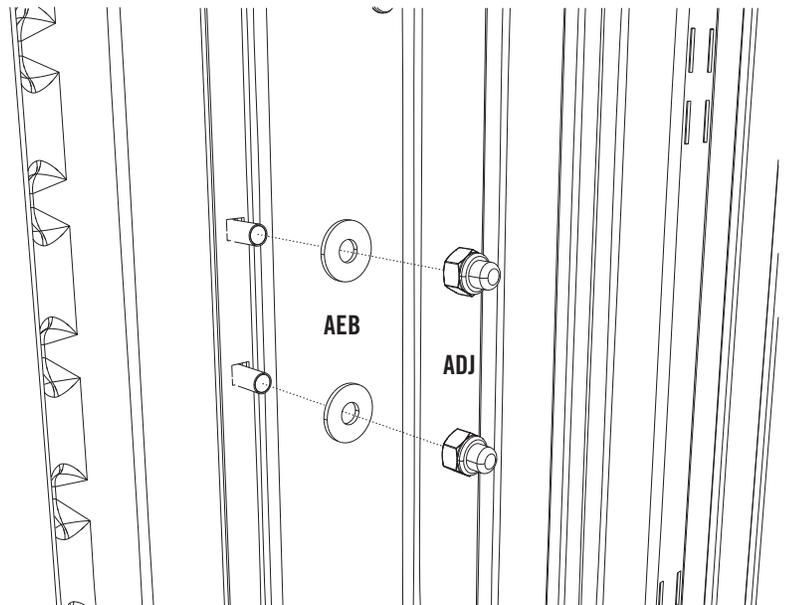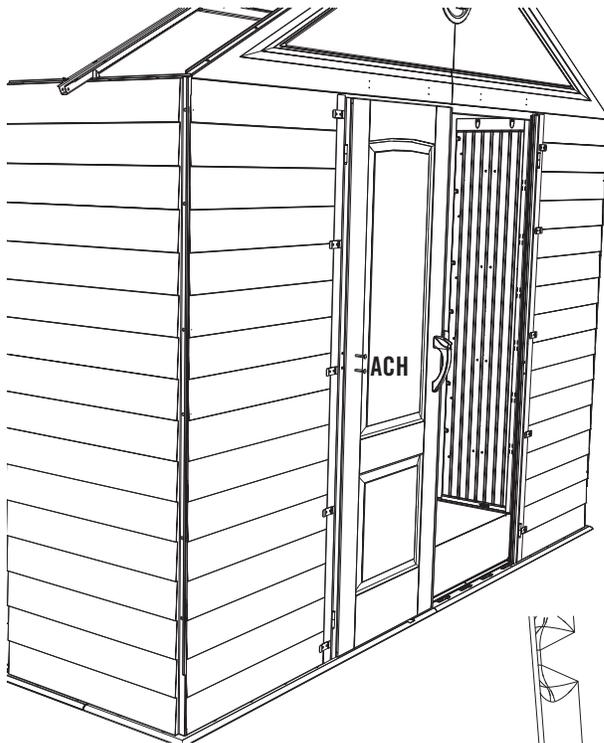


Back of Door



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AHL (x1)
(Not to scale)



ADX (x2)


SEC 9



SEC

9.10

Secure the **Deadbolt Strike Plate (AHL)** to the Floor using two (2) **#10 x 1/2" Pan-Head Screws (ADX)**.

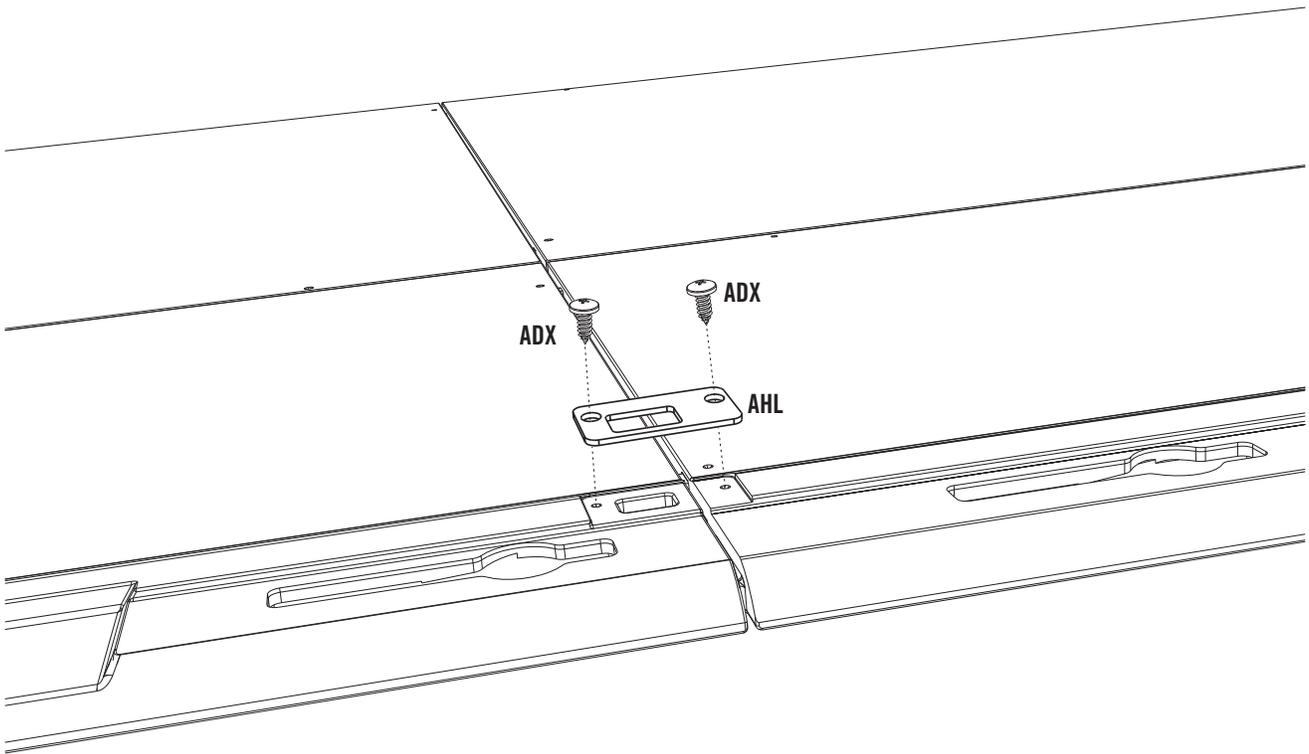


SEC 10 TRIM INSTALLATION


HARDWARE REQUIRED

HARDWARE BAG REQUIRED: BND


Hardware shown at actual size (*Unless indicated otherwise)




ADX (56)
#10 x 1/2" Pan-Head Screw




ACK (4)
#8 x 1" Pan-Head Screw



***AHR** (x2)
Door Trim Clip



***AHQ** (x4)
Door Trim Bracket




***AGA** (x24)
Corner Trim Bracket


PLASTIC PARTS REQUIRED

LOCATED IN BOX: 2


Parts shown at 4% of actual size

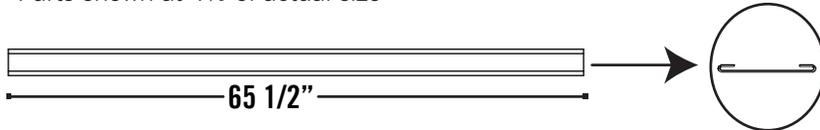

AGC (x1) Top Door Trim

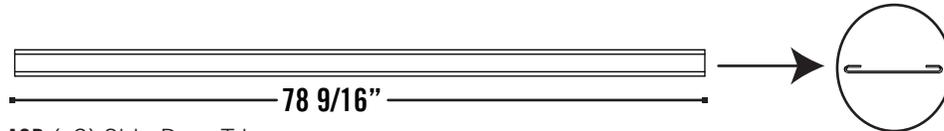


AGD (x2) Side Door Trim

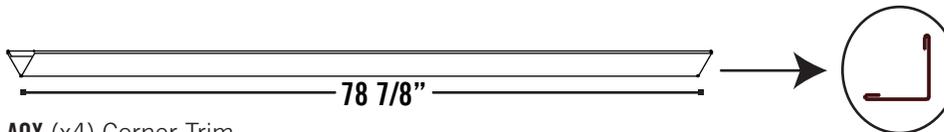

AQX (x4) Corner Trim


TOOLS REQUIRED



Phillips Screwdriver



Safety Glasses




7/16" Wrench (x2)



Pliers



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADX (8)



AHQ (x4)
(Not to scale)

SEC 10




SEC

10.1

DOOR TRIM INSTALLATION


Slide **Side Door Trim (AGD)** into place onto Door Hinge Brackets.

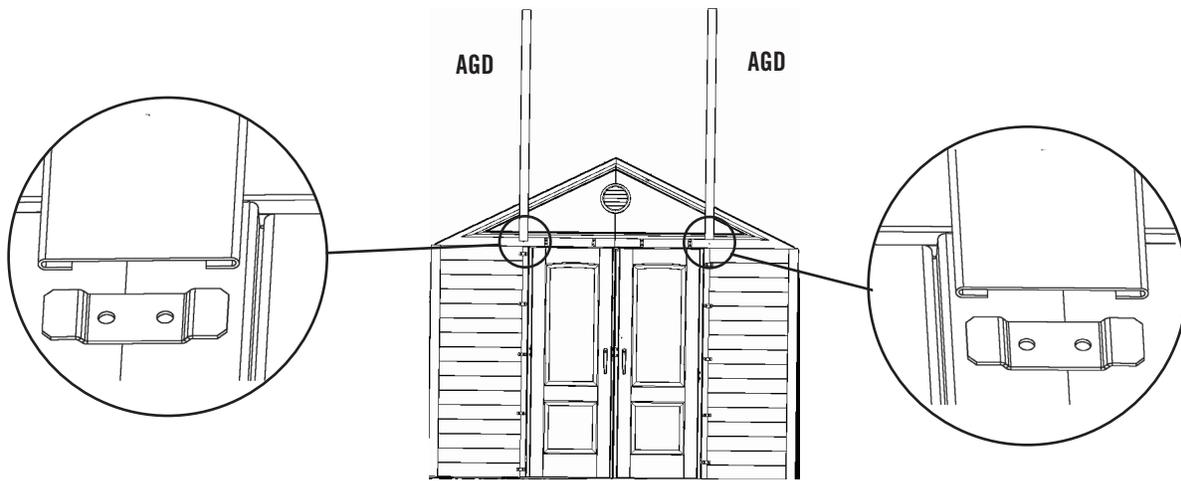

SEC

10.2

Attach four (4) **Door Trim Brackets (AHQ)** above the Door frame at the locations shown.


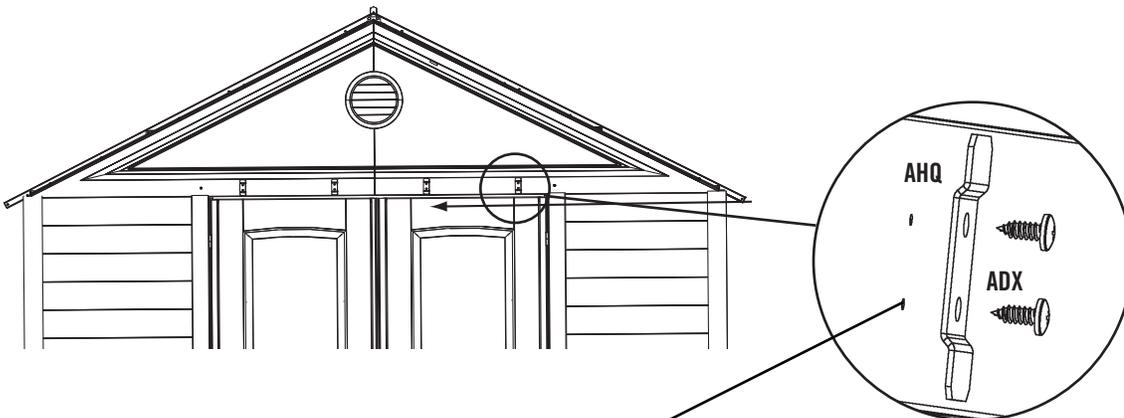


Note: Look for screw hole locator marks above the Door frame.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC: 10



AHR (x2)
(Not to scale)



SEC

10.3

Slide **Door Trim Clips (AHR)** into the top of the Side Door Trim (Fig. 1), on each side of the Door. Slide the **Top Door Trim (AGC)** into place, and secure with the Door Trim Clips (Fig. 2).

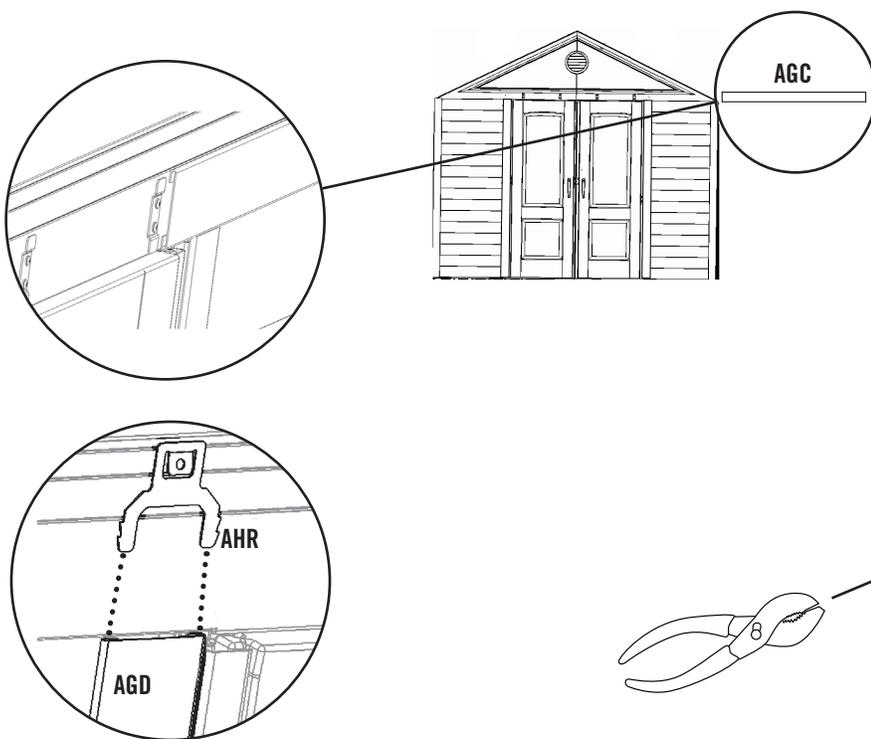


Fig. 1

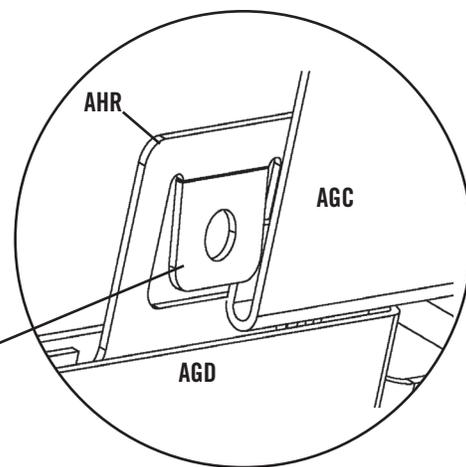


Fig. 2





Note: You may need to slightly bend the tab outward with pliers.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE


SEC 10



ADX (x48)



ACK (x4)



AGA (x24)
(Not to scale)




SEC

10.4

CORNER TRIM INSTALLATION

Snap six (6) **Black Trim Brackets (AGA)** to a corner of the Shed. Fasten each Bracket with two (2) **#10 x 1/2" Screws (ADX)**. There are no pilot holes in the Shed Wall; the Screws are inserted directly into the plastic.

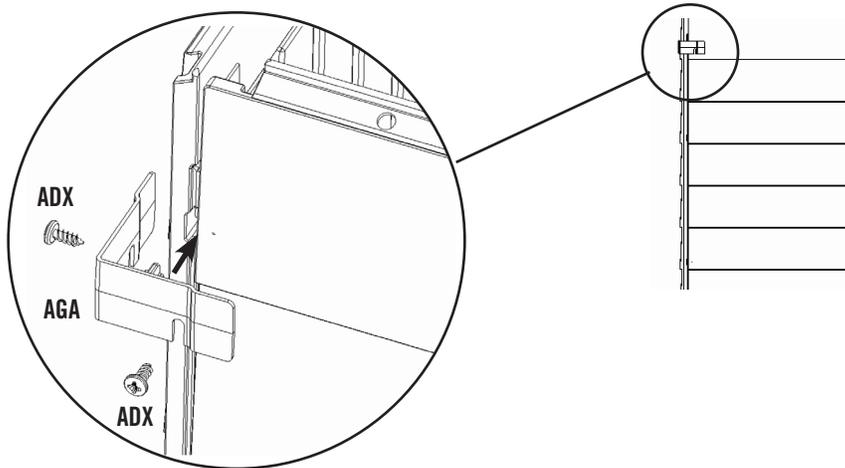

ADX

AGA

ADX



Note: The tab on the Trim Brackets fit into the six screw indentations along each corner of the Shed.




WARNING

Use extreme caution when standing on ladders to perform assembly steps. Follow all warnings and cautions on the ladder. Failure to follow all of these instructions and warnings could lead to serious personal injury or property damage.

SEC

10.5

Slide **Corner Trim Piece (AQX)** onto the Brackets. Align the Trim Piece with the top of the Wall Panel and fasten with one (1) **#8 x 1" Pan-Head Screw (ACK)**. Insert the Screw on the side of the Shed so that it will be hidden by the Roof overhang.

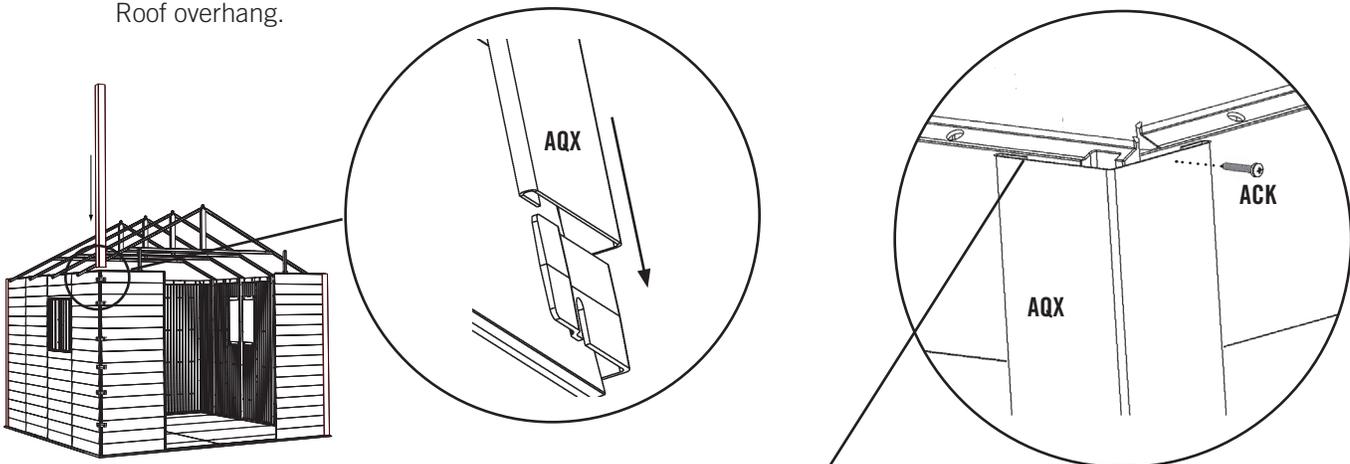

AQX

ACK

AQX




Note: Ensure the Corner Trim Piece is even with the front edge of the Wall Panel before securing with Screw.

SEC 11 ROOF & REAR GABLE INSTALLATION


HARDWARE REQUIRED

HARDWARE BAG REQUIRED: BUC

Hardware shown at actual size (*Unless otherwise noted)




ADZ (x86)
1/4" x 5/8" Pan-Head Screw
(Not all screws will be used)




***AJA** (x4)
Foam Cube




ADK (x1)
#10 Cap Nut



AED (x4) #10 x 1"
Fender Washer



ACJ (x4)
#10 x 5/8" Pan-Head Screw



ADX (x4)
#10 x 1/2" Pan-Head Screw




ACF (x1)
#10 x 5/16" Pan-Head Screw

METAL PARTS REQUIRED

LOCATED IN BOX: 1

Parts shown at 8% of actual size




AFF (x2)
Gable Truss Brace


PLASTIC PARTS REQUIRED

LOCATED IN BOX: 1


Parts shown at 4% of actual size (*Unless otherwise noted)

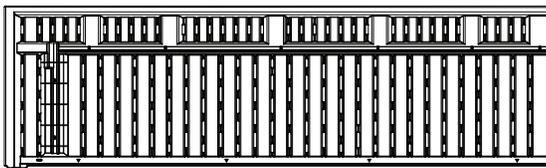


AGU (x2) Outer Roof Panel "A"



AGE (x2) End Roof Cap

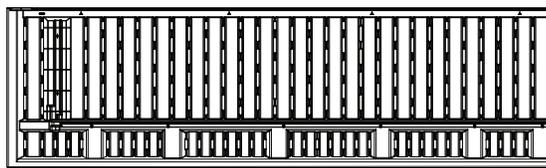


AGV (x2) Outer Roof Panel "B"



***AHA** (x2)
Roof Cap Cover


TOOLS REQUIRED




Phillips Screwdriver



7/16" Wrench





Flashlight



Safety Glasses



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x24)



SEC. 11



SEC

11.1



Install two **Outer Roof Panels "A" & "B" (AGU & AGV)** at the front of the shed as shown. The top of the Wall Panel fits into the groove near the bottom edge of the Panel. Align the holes in the Wall Panel, Entry Gable, and Truss Assembly with those in the Outer Roof Panel. Secure the Outer Roof Panels to the Entry Gable, Wall Panels, and Truss Assembly using twenty-four (24) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

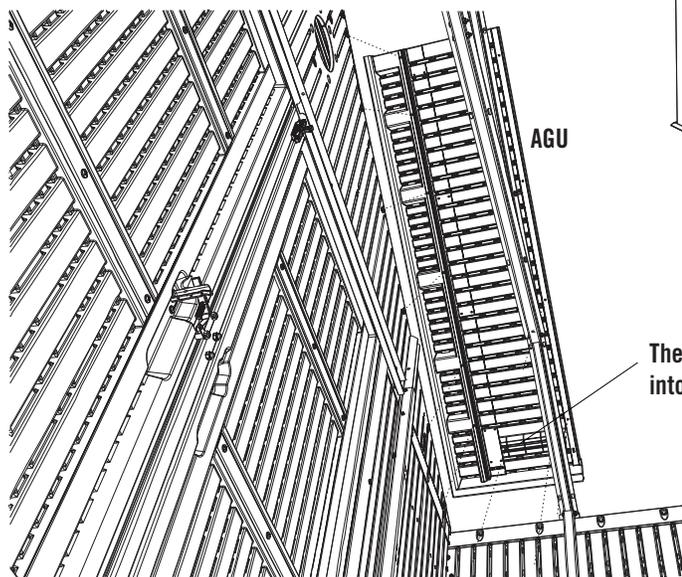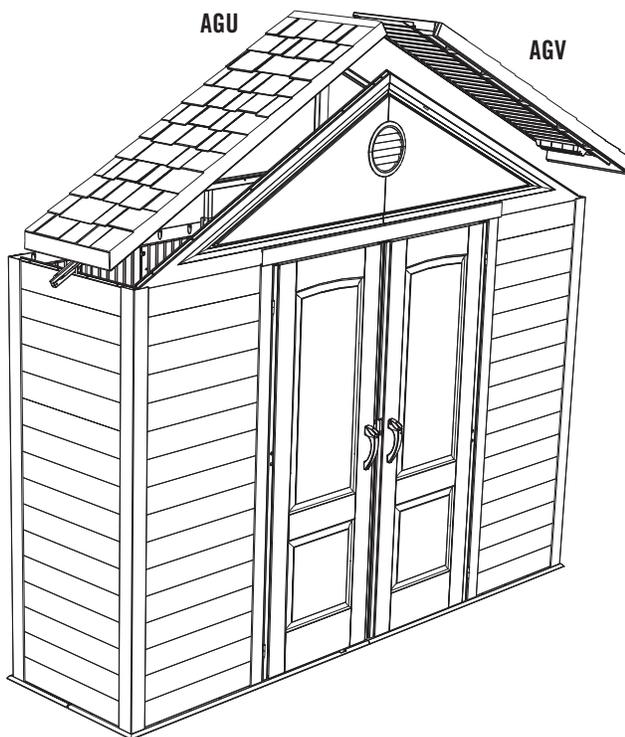

Interior Upward View



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x22)



SEC 11



SEC



11.2

Install the Rear Gable Assembly to the tops of the rear Wall Panels using sixteen (16) 1/4" x 5/8" Pan-Head Screws (ADZ). Also, secure the Rear Gable Assembly to the Wall Support Channel Extensions using six (6) 1/4" x 5/8" Pan-Head Screws (ADZ).

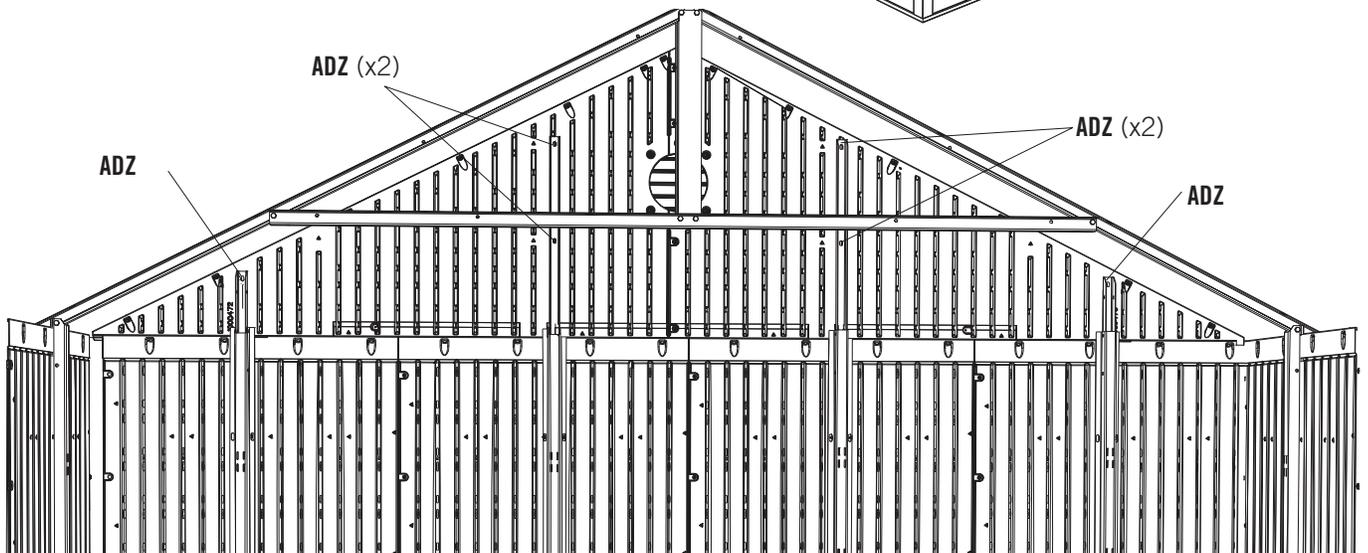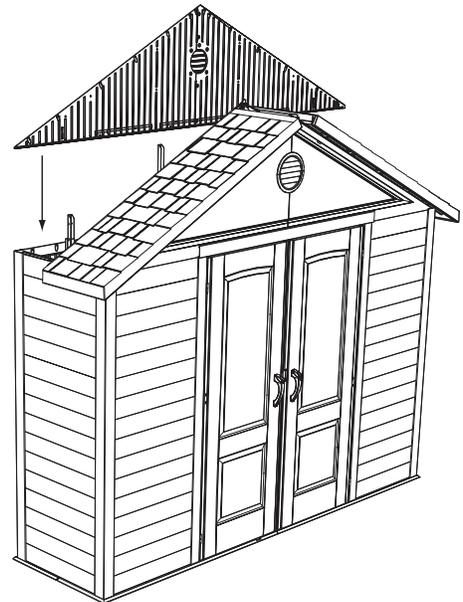



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x24)


SEC. 11



SEC

11.3



Install the last two **Outer Roof Panels "A" & "B" (AGU & AGV)** at the rear of the shed as shown. Secure the Outer Roof Panels to the Rear Gable and Truss Assembly using twenty-four (24) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

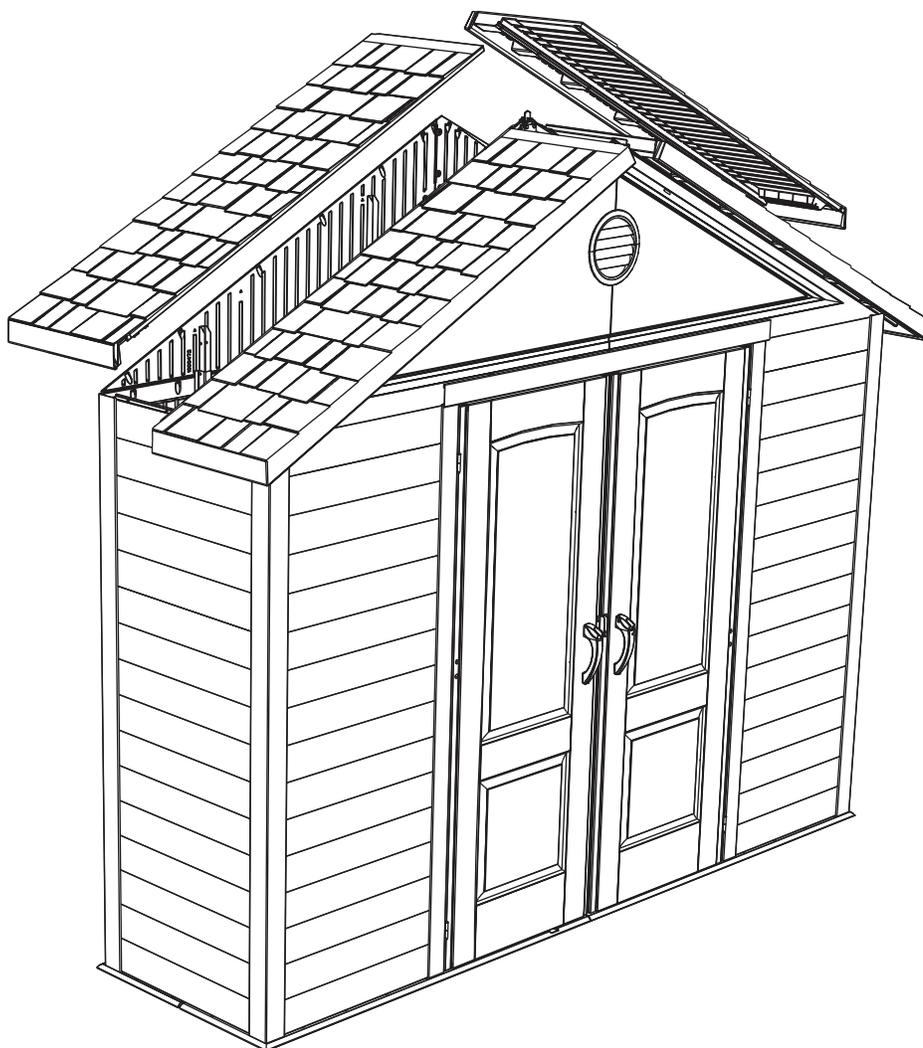




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE


SEC 11



ADZ (x8)



ACJ (x4)



AED (x4)





SEC

11.4


Starting at the front of the shed, install the two (2) **End Roof Caps (AGE)** to the Roof. Connect the Roof Caps to the Trusses and Gables using **1/4" x 5/8" Pan-Head Screws (ADZ)** and to the Roof Panels using **#10 x 5/8" Pan-Head Screws (ACJ)** and **#10 x 1" Fender Washers (AED)**.



Only use a hand screwdriver on this step

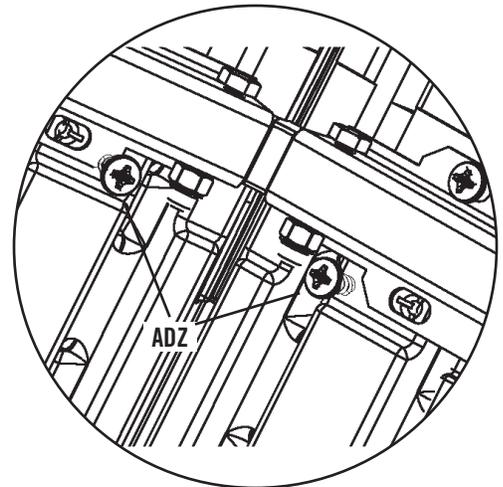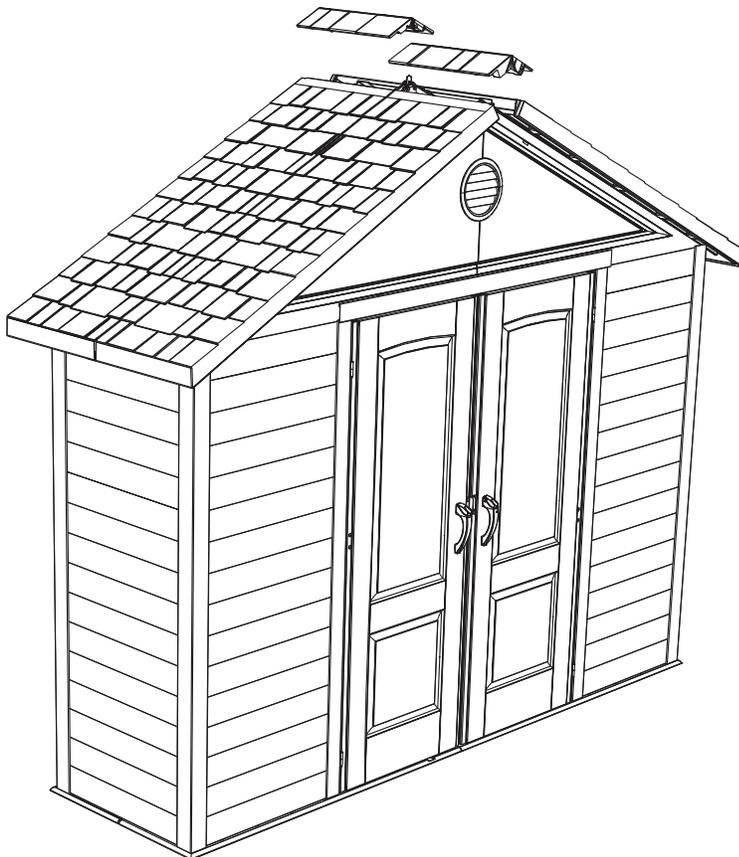



Attach Roof Caps to both sides of Trusses using **1/4" x 5/8" Pan-Head Screws (ADZ)**.

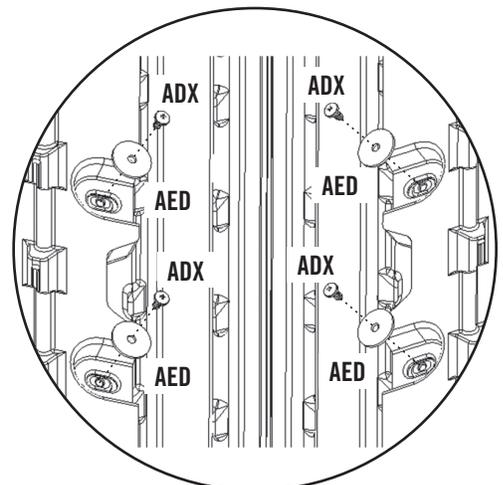

Attach Roof Caps Roof Panels using **#10 x 5/8" Pan-Head Screws (ACJ)** and **#10 x 1" Fender Washers (AED)**.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x4)


SEC. 11



SEC


11.5

Connect a **Roof Cap Cover (AHA)** to the Front of the Shed as shown using the required hardware. Repeat this step for the rear of the shed.


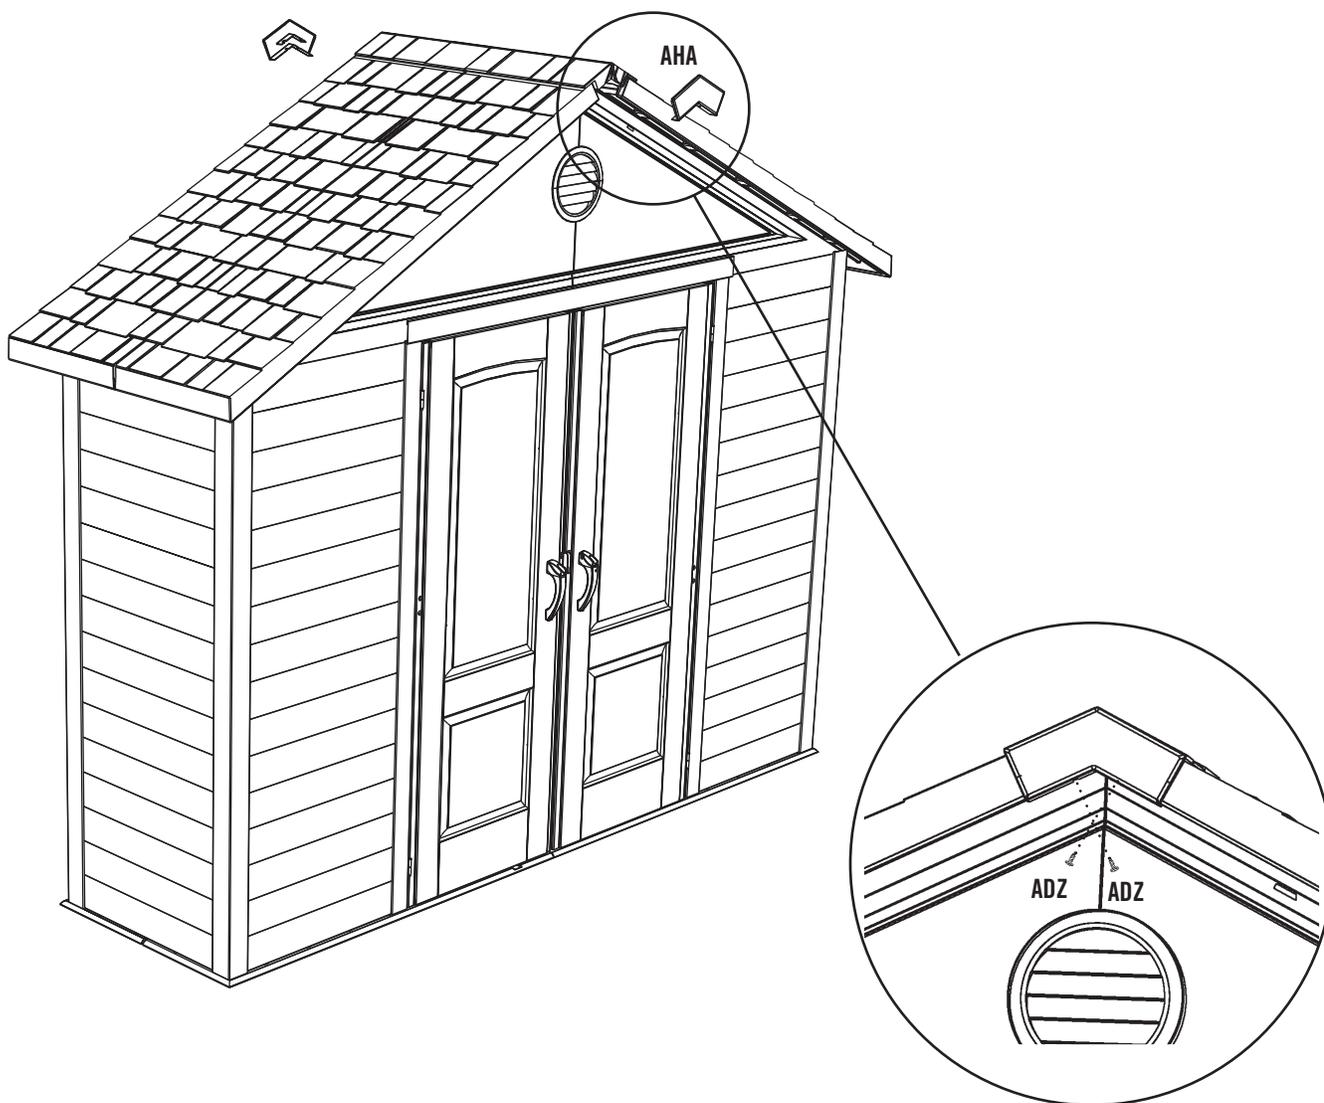




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



7/16"



ADX (x4)



ADK (x1)



ACF (x1)


SEC 11




SEC

11.6

Connect a **Gable Truss Brace (AFF)** between the front Truss Assembly and Entry Gable and the rear Truss and Rear Gable Assemblies using two (2) **#10 x 1/2" Pan-Head Screws (ADX)** each. Secure the Gable Truss Brace into the Door Header Channel (on Entry Gable) using one (1) **#10 x 5/16" Pan-Head Screw (ACF)** and one (1) **#10 Cap Nut (ADK)**.

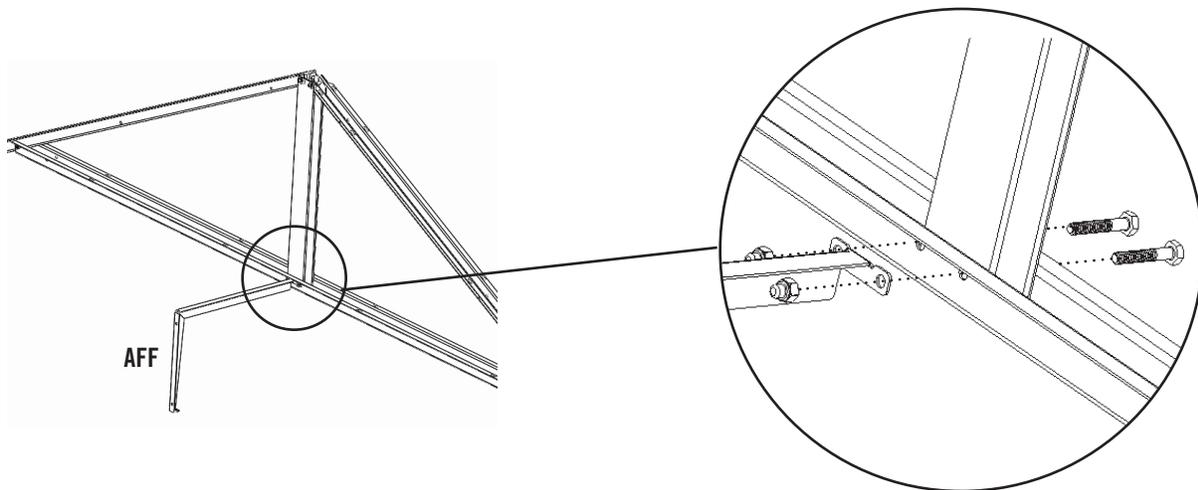

Remove the Hex Bolts and Cap Nuts from the Truss and use them to connect the Gable Truss Brace to the Truss.


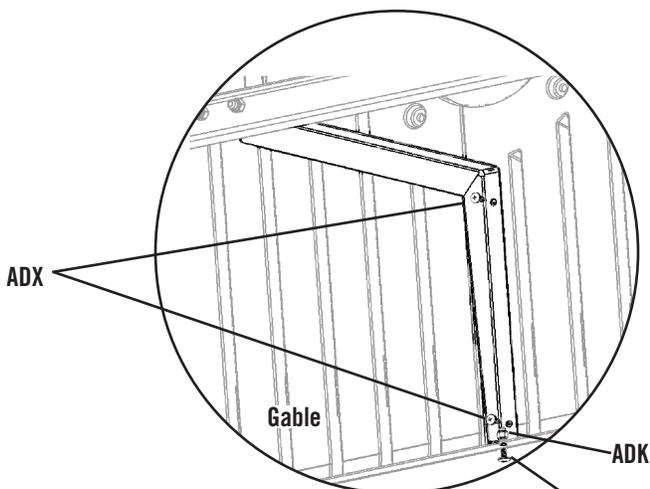


There are no pilot holes in the Gable to receive the Screws (ADX). Insert them directly into the plastic.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC. 11



ADZ (x4)




AJA (x4)



SEC

11.7


Along the outside of the shed, underneath the eaves, fasten the Truss Assemblies to the Roof Panels using two (2) 1/4" x 5/8" Pan-Head Screws (ADZ) per side.

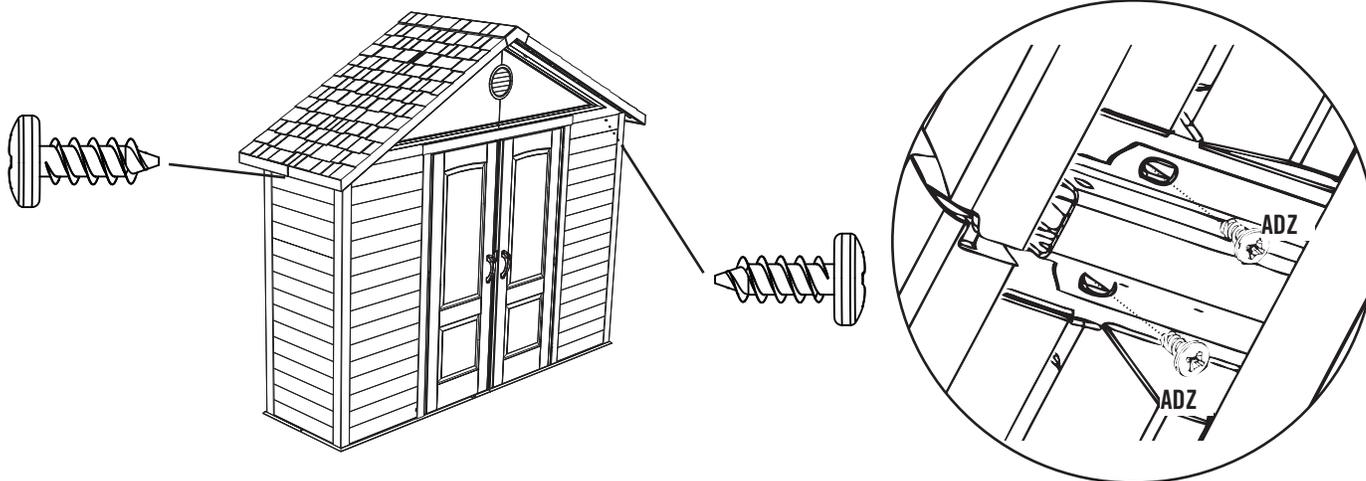

SEC

11.8


Insert two Foam Cubes (AJA) at each truss location.

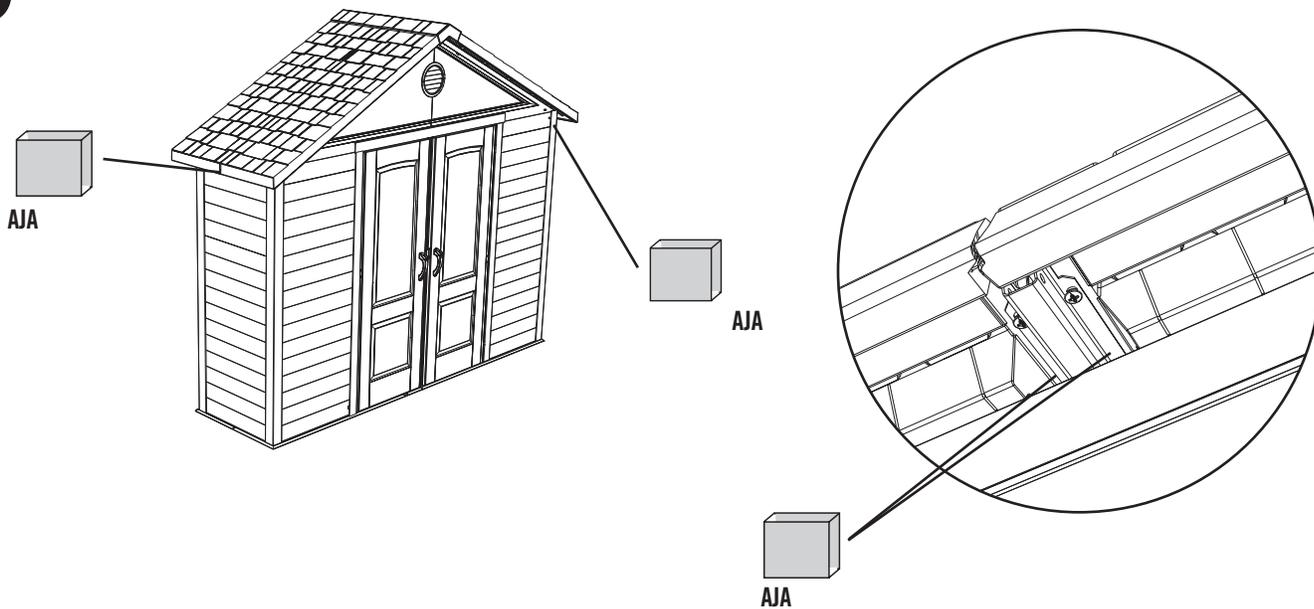

SEC 12 PEGBOARD STRIP INSTALLATION

HARDWARE REQUIRED


Hardware shown at actual size




ADW (x10)
#10" x 3/4" Pan-Head Screw

HARDWARE BAGS REQUIRED: BHC, BHD


Hardware shown at 50% of actual size

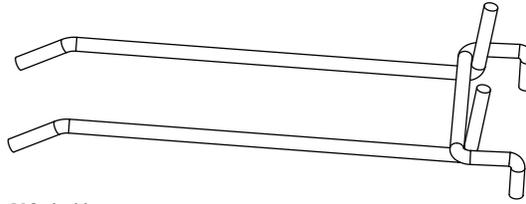


AIG (x1)
4" Double-Arm Hook




AIJ (x2)
Toolholder

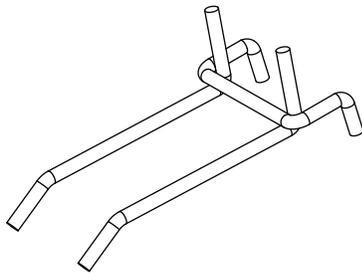

AIF (x1)
2" Double-Arm Hook




AIH (x3)
J-Hook



AII (x3)
L-Hook

PLASTIC PARTS REQUIRED


Parts shown at 15% of actual size



AFU (x2)
Pegboard Strip

SHED PARTS BOX REQUIRED: BUE

TOOLS REQUIRED



Phillips Screwdriver





Safety Glasses



Level



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADW (x10)

SEC 12




SEC

PEGBOARD STRIP INSTALLATION

12.1

Using a level, position the **Pegboard Strip (AFU)** in any desired location along a Wall Panel wall. Screw the Pegboard Strip to the Wall using five (5) **#10 x 3/4" Phillips Pan-Head Screws (ADW)**. See Note. Repeat this step for second Pegboard Strip.

! Note: The Pegboard Strip is screwed directly into the plastic. Line up the Strip anywhere on Wall so holes are over plastic (and not over a groove in the Wall).

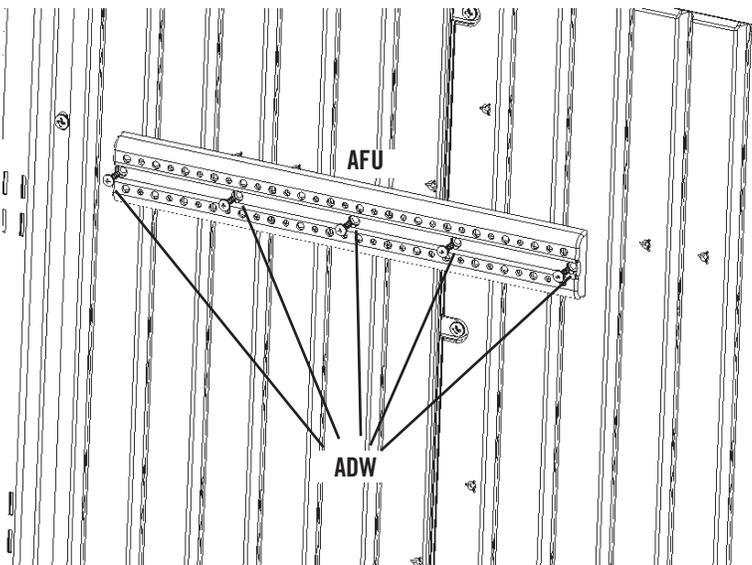

! Note: Ensure the Pegboard Strip is level before inserting Screws.

SEC


12.2

Insert **Hooks (AIF, AIG, AIH, AII, and AIJ)**.

SEC 13 SHELF ASSEMBLY

HARDWARE REQUIRED

Hardware shown at actual size



ADZ (x70)
#10 x 1/2" Pan-Head Screw
(Not all are used)


HARDWARE BAG REQUIRED: BHH (x5), BMY (x2)

Parts shown at 15% of actual size




AIY (x10)
10" Shelf Bracket

Hardware shown at actual size



ADX (x8)
#10 x 1/2" Pan-Head Screw
(Not all are used)



AEE (x8)
#10 x 1/2" Flat Washer
(Not all are used)

METAL PARTS REQUIRED

Parts shown at 15% of actual size




AIZ (x4)
14" Shelf Bracket


SHED PARTS BOX REQUIRED: BUE

PLASTIC PARTS REQUIRED

Parts shown at 4% of actual size



AFS (x5)
10" x 30" Shelf



AFT (x2)
14" x 30" Shelf

LOCATED IN BOX: 1

TOOLS REQUIRED





Phillips Screwdriver




Safety Glasses




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x20)



ADX (x8)



AEE (x8)

SEC 13




SEC

13.1

10" & 14" SHELF ASSEMBLY


Insert the **10" Shelf Support Brackets (AIY)** into the slots of adjacent Wall/Shelf Support Channels. Insert the Shelf Support Brackets at an angle, and then set them straight.

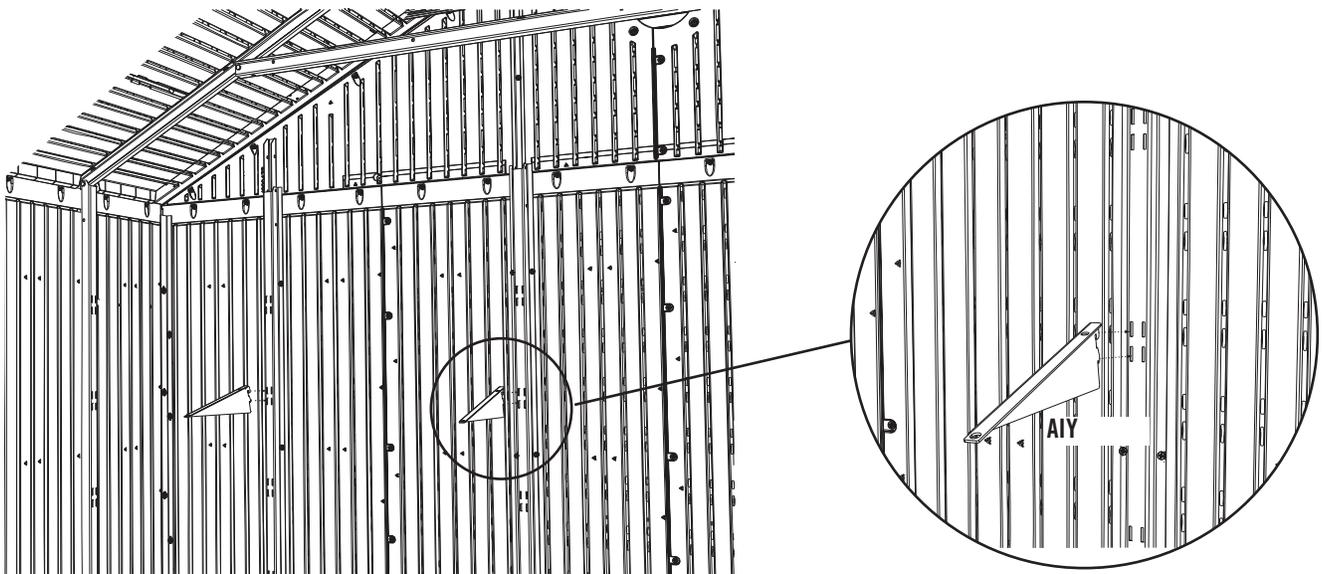

SEC

13.2

Place the **10" x 30" (AFS)** on the Shelf Support Brackets and fasten them with **1/4" x 5/8" Pan-Head Screws (ADZ)**. Repeat this section for the **14" x 30" Shelves** with **#10 x 1/2" Pan-Head Screws (ADX)** and **#10 Flat Washers (AEE)**.

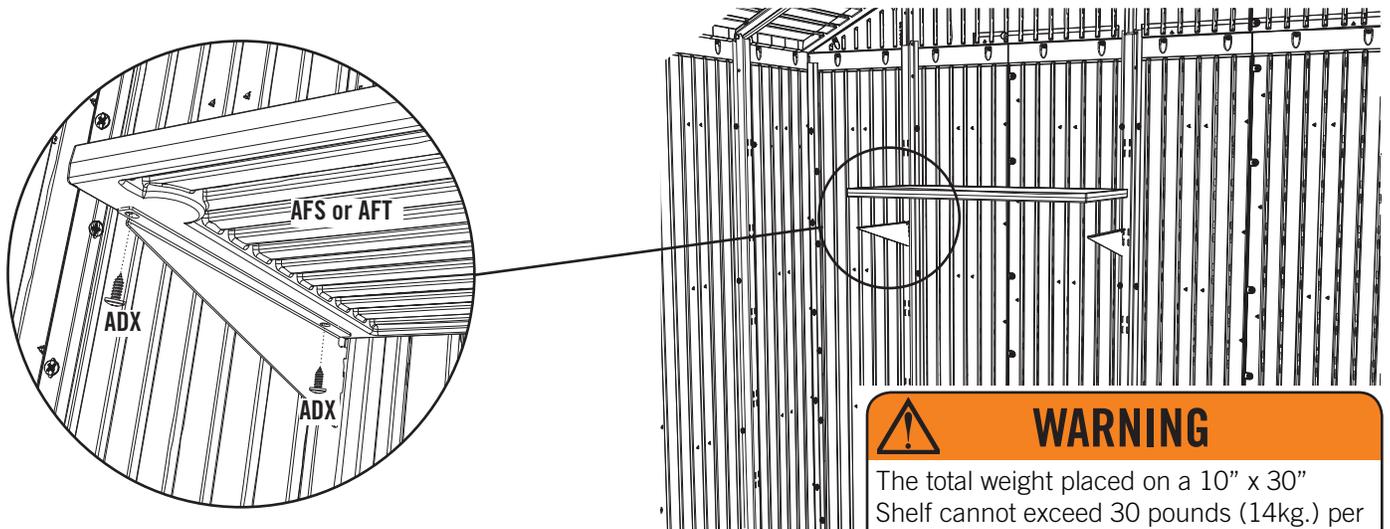

WARNING


The total weight placed on a 10" x 30" Shelf cannot exceed 30 pounds (14kg.) per Wall Panel.

SEC 14 FINAL STEPS

HARDWARE REQUIRED


HARDWARE BAG REQUIRED: BTM

Hardware shown at actual size



ADZ (x4)
1/4" x 5/8" Pan-Head Screws

TOOLS REQUIRED



Phillips Screwdriver



Hammer Drill



3/16" Masonry Bit





Safety Glasses



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC. 14



ADZ (x4)

4,8 mm




SEC

DOOR SPACING ADJUSTMENT


14.1

You may need to move the tops and/or bottoms of the doors to eliminate uneven gaps. Loosen the Carriage Bolts at the four corners of the Door Frame. Loosen all screws in the left and right Door Hinges by a half a turn. Move Doors until gaps are even. Re-tighten all hardware. After all hardware has been retightened, secure the hinges to the Floor using four (4) **1/4" x 5/8" Pan-Head Screws (ADZ)**.


Loosen the Screws in both Hinges before adjusting Doors.

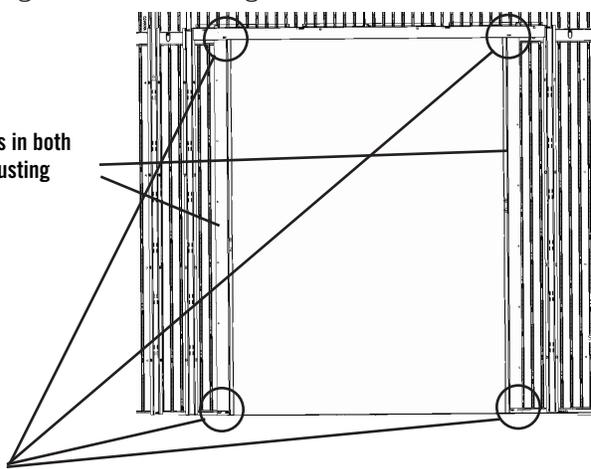

Loosen these Carriage Bolts before adjusting Doors.

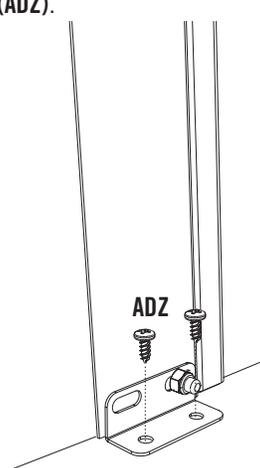

Right Door Hinge

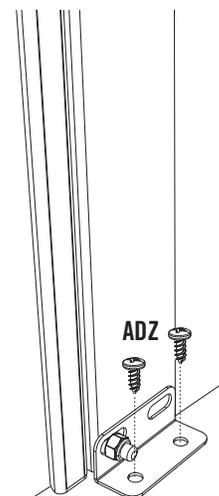

Left Door Hinge


SEC

ANCHORING THE SHED

14.2

If you plan on anchoring your shed to your platform, ensure your shed is in the position you would like it to be on your Platform. While another person holds the Shed in place, use a 3/16" masonry bit (for concrete platforms) or a 3/16" drill bit (for wooden platforms) to drill through the hole in each L-Bracket at the bottom of each Wall Support Channel and into the platform beneath (2" deep). The anchoring hardware used depends on your platform. If you have a concrete platform, we recommend using 1/4" x 2" Cement Screws, e.g., Tapcon Anchors. If you have a wood-framed platform, we recommend using 1/4" x 1" Lag Bolts. **Do not exceed a 3/8" diameter bolt.** Use a hammer drill to insert the cement screws or a regular drill to insert the Lag Bolts. Refer to your local hardware store for this hardware.

Insert Anchoring Hardware through the Floor Brackets attached to the bottom of each Wall Support.

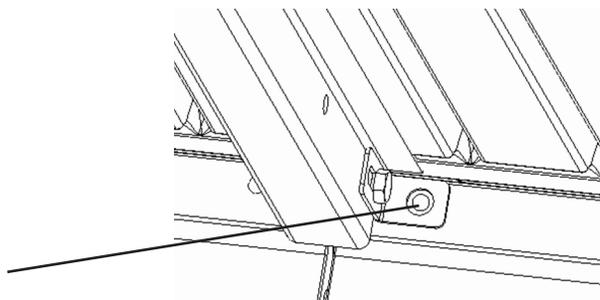

Note: Do not use a drill bit or hardware that exceeds 3/8" in diameter.

CLEANING & CARE

Congratulations on your Lifetime® product purchase. By following the instructions below, your new Lifetime product should provide you with years of service and enjoyment.

Cleaning and Care

The polyethylene panels are stain- and solvent-resistant. Most stains can be removed, using a mild soap and a soft-bristled brush. Abrasive cleaning materials may scratch the plastic and are not recommended. Repair scratches or rust spots on the metal by sanding the affected area lightly; using a rust preventative spray primer; and finally, spraying with a high-gloss spray enamel paint. Avoid placing a direct heat source on or near surfaces unless using a heat barrier.

LIFETIME OUTDOOR SHED EQUIPMENT

10-YEAR LIMITED FACTORY WARRANTY

THE MANUFACTURER RESERVES THE RIGHT TO MAKE SUBSTITUTIONS TO WARRANTY CLAIMS IF PARTS ARE UNAVAILABLE OR OBSOLETE.

1. Lifetime outdoor sheds are warranted to the original purchaser to be free from defects in material or workmanship for a period of ten years from the date of original retail purchase. The word “defects” is defined as imperfections that impair the use of the product. Defects resulting from misuse, abuse or negligence will void this warranty. This warranty does not cover defects due to improper installation, alteration or accident. This warranty does not cover damage caused by vandalism, rusting, “acts of nature” or any other event beyond the control of the manufacturer.
2. This warranty is nontransferable and is expressly limited to the repair or replacement of defective product. If the product is defective within the terms of this warranty, Lifetime Products, Inc. will repair or replace defective parts at no cost to the purchaser. Shipping charges to and from the factory or distribution center are not covered and are the responsibility of the purchaser. Labor charges and related expenses for removal, installation or replacement of the shed or its components are not covered under this warranty.
3. This warranty does not cover scratching or scuffing of the product that may result from normal usage. In addition, defects resulting from intentional damage, negligence, unreasonable use or hanging from the truss will void this warranty.
4. Liability for incidental or consequential damages is excluded to the extent permitted by law. While every attempt is made to embody the highest degree of safety in all equipment, freedom from injury cannot be guaranteed. The user assumes all risk of injury resulting from the use of this product. All merchandise is sold on this condition, and no representative of the company may waive or change this policy.
5. This product is not intended for institutional or commercial use; Lifetime Products, Inc. does not assume any liability for such use. Institutional or commercial use will void the warranty.
6. This warranty is expressly in lieu of all other warranties, expressed or implied, including warranties of merchantability or fitness for use to extent permitted by Federal and state law. Neither Lifetime Products, Inc., nor any representative assumes any other liability in connection with this product. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

PLEASE INCLUDE YOUR DATED SALES RECEIPT AND PHOTOGRAPHS OF DAMAGED PARTS.

REPORT PRODUCT DEFECTS IN WRITING TO:

Lifetime Products, Inc., PO Box 160010 Clearfield, UT 84016-0010
or call 1-800-225-3865 M-F 7 a.m. to 5 p.m. MST.

REGISTER YOUR PRODUCT FOR QUICKER CUSTOMER SERVICE.

Visit www.lifetime.com or call 1-800-225-3865 to register your product today.

FOR INTERNATIONAL WARRANTY CLAIMS:

All warranty claims must be accompanied by a sales receipt. Report all warranty claims in writing to your regional sales support representative. Please include your dated sales receipt and photographs of damaged parts.

To identify the representative for your region — Please visit: www.lifetime.com/international



www.lifetime.com

ENHANCE YOUR LIFETIME® PURCHASE BY ADDING ACCESSORIES OR OTHER GREAT PRODUCTS

To purchase accessories or other Lifetime Products, visit us at:

www.lifetime.com

Or call: 1-800-424-3865

